


PROJECT	ENGINEER	SUBMITTED BY
DATE	ARCHITECT	
SHEET OF	CONTRACTOR	

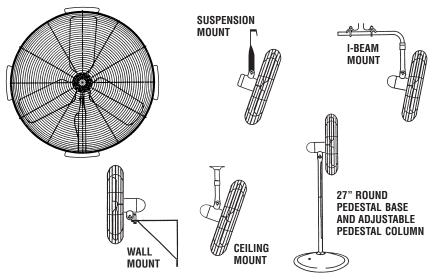

## **SPECIFICATIONS**

- □ 30" diameter.
- ☐ 2 Speed, 1/3 HP, single phase, 120 volt, totally enclosed, permanently lubricated ball bearings, built-in thermal overload protection, permanent split capacitor motor with 2-speed, Drop-Cord switch.
- ☐ Precision balanced aluminum blades.
- ☐ Safety yellow powder paint coated motor, guards and mounts.
- ☐ Meets federal OSHA standards.
- ☐ Hindged Guards swing open for easy cleaning.

## **OPTIONAL MOUNTS**

- □ Wall\*□ Adjustable Pedestal□ I-Beam\*
- □ 27" Round Base □ Suspension Mount\*

<sup>\*</sup>All wall, ceiling and I-beam mounts come with Secondary Support Cable.

		Y MARK		RI ADE	BLADE FAN SIZE STYLE	CFM		RPM		MOTOR	MAX	
ITEM	QTY					НІ	LOW	НІ	LOW	H.P.	AMPS	REMARKS

SAFETY YELLOW HIGH PERFORMANCE AIR CIRCULATOR

SUBMITTAL SHEET