

## CPL SERIES DECORATIVE PEDESTAL

MADE TO ORDER



### IDEAL SPACES

- Institutional and Commercial
- Offices
- Hallways
- Lobbies
- Condos
- Conference Rooms
- Retail Spaces
- Terminals
- Other Areas without Wall Mounting Options

### COLORS

- Neutral Gray
- Charcoal Gray
- Navajo White
- Northern White
- Statuary Bronze
- Desert Tan
- Gloss Black
- Custom Colors Available

### DIMENSIONS

- See Specifications

- CPL (Decorative) ideal for primary, secondary or supplemental heat where wall mounting is not viable
- Perfect for under-the-window heat loss and condensation prevention
- Durable front cover constructed of 16-gauge steel (optional 14-gauge available)
- Pedestal-mounted design; bottom inlet - top outlet
- Units may contain 1-3 heating elements that yield a broad range of heating capacity (see specifications)
- Optional 1/4 in. mesh located under the discharge grille to deter insertion of objects and restriction of airflow
- Blend into any décor with 8 standard color options or custom finishes available upon request
- Units can be mounted from wall-to-wall or as discrete units in standard lengths of 28 in. to 10 ft.
- Optional built-in controls include: line voltage thermostat (SPST or DPST); power on/off switch; power relay; or transformer relay (see specifications)
- Right- or left-hand entry/wiring flexibility with identical pre-wired junction boxes at either end
- Built-in wire way with factory-installed wiring rated 35 amps for CPLAS and 45 amps for CPLAM
- Easy connection of supply wiring from bottom, rear or end, as well as multiple wiring of adjacent heaters from one entry point
- For service, all internal parts are accessible by removing cover



# CPL SERIES

## DECORATIVE PEDESTAL

### MODELS & SPECIFICATIONS / CPL SERIES (5-1/2" x 3" w/SINGLE ELEMENT)

CATALOG NO	LENGTH (FT)	WATTS PER FT.	TOTAL HEATING CAPACITY		AMPS						NO. OF ELEMENTS	SHIP WT. (LBS)
			TOTAL WATTS	BTU/HR	120V	208V	240V	277V	347V	600V		
CPLAS2125	2.3	125	250	853	2.1	1.2	1.0	0.9	0.7	0.4	1	11
CPLAS2188		188	375	1280	3.1	1.8	1.6	1.4	1.1	0.6		
CPLAS2250		250*	500	1706	4.2	2.4	2.1	1.8	1.4	0.8		
CPLAS3125	3	125	375	1280	3.1	1.8	1.6	1.4	1.1	0.6	1	15
CPLAS3188		188	546	1925	4.7	2.7	2.4	2.0	1.6	0.9		
CPLAS3250		250*	750	2560	6.2	3.6	3.1	2.7	2.2	1.2		
CPLAS4125	4	125	500	1706	4.2	2.4	2.1	1.8	1.4	0.8	1	18
CPLAS4188		188	750	2560	6.2	3.6	3.1	2.7	2.2	1.2		
CPLAS4250		250*	1000	3412	8.3	4.8	4.2	3.6	2.9	1.7		
CPLAS5125	5	125	625	2133	5.2	3.0	2.6	2.3	1.8	1.0	1	25
CPLAS5188		188	940	3208	7.8	4.5	3.9	3.4	2.7	1.6		
CPLAS5250		250*	1250	4266	10.4	6.0	5.2	4.5	3.6	2.1		
CPLAS6125	6	125	750	2560	6.2	3.6	3.1	2.7	2.2	1.2	1	29
CPLAS6188		188	1125	3840	9.4	5.4	4.7	4.1	3.2	1.9		
CPLAS6250		250*	1500	5120	12.5	7.2	6.3	5.4	4.3	2.5		
CPLAS8125	8	125	1000	3412	-	4.8	4.2	3.6	2.8	1.7	1	38
CPLAS8188		188	1500	5120	-	7.2	6.3	5.4	4.3	2.5		
CPLAS8250		250*	2000	6824	-	9.6	8.3	7.2	5.8	3.3		
CPLAS10125	10	125	1250	4266	-	6.0	5.2	4.5	3.6	2.1	1	47
CPLAS10188		188	1875	6400	-	9.0	7.8	6.8	5.4	3.1		
CPLAS10250		250*	2500	8532	-	12.0	10.4	9.0	7.2	4.2		

### MODELS & SPECIFICATIONS | CPL SERIES (7" x 5" w/MULTIPLE ELEMENTS)

cont. on next page

CATALOG NO	LENGTH (FT)	WATTS PER FT.	TOTAL HEATING CAPACITY		AMPS					NO. OF ELEMENTS	SHIP WT. (LBS)
			TOTAL WATTS	BTU/HR	208V (1 PH / 3 PH)	240V (1 PH / 3 PH)	277V (1 PH)	347V (1 PH)	600V (1 PH / 3 PH)		
CPLAM2125	2.3	125	250	853	1.2 / -	1.0 / -	0.9	0.7	0.4 / -	1	18
CPLAM2188		188	375	1280	1.8 / -	1.6 / -	1.4	1.1	0.6 / -		
CPLAM2250		250	500	1706	2.4 / -	2.1 / -	1.8	1.4	0.8 / -		
CPLAM2375		375	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -	2	
CPLAM2500		500	1000	3412	4.8 / -	4.2 / -	3.6	2.9	1.7 / -		
CPLAM2564		564	1125	3840	5.4 / 3.1	4.7 / 2.7	4.1	3.2	1.9 / 1.1		
CPLAM2625		625	1250	4266	6.0 / 3.5	5.2 / 3.0	4.5	3.6	2.1 / 1.2	3	
CPLAM2750		750	1500	5120	7.2 / 4.2	6.3 / 3.6	5.4	4.3	2.5 / 1.4		
CPLAM3125		125	375	1280	1.8 / -	1.6 / -	1.4	1.1	0.6 / -		
CPLAM3188	188	564	1925	2.7 / -	2.4 / -	2.0	1.6	0.9 / -			
CPLAM3250	250	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -			
CPLAM3375	3	375	1125	3840	5.4 / -	4.7 / -	4.1	3.2	1.9 / -	2	22
CPLAM3500		500	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -		
CPLAM3564		564	1690	5768	8.1 / 4.7	7.0 / 4.1	6.1	4.8	2.8 / 1.6		
CPLAM3625		625	1875	6400	9.0 / 5.2	7.8 / 4.5	6.8	5.4	3.1 / 1.8	3	
CPLAM3750		750	2250	7680	10.8 / 6.3	9.4 / 5.4	8.1	6.5	3.7 / 2.1		
CPLAM4125	4	125	500	1706	2.4 / -	2.1 / -	1.8	1.4	0.8 / -	1	29
CPLAM4188		188	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -		
CPLAM4250		250	1000	3412	4.8 / -	4.2 / -	3.6	2.9	1.7 / -		
CPLAM4375		375	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -	2	
CPLAM4500		500	2000	6824	9.6 / -	8.3 / -	7.2	5.8	3.3 / -		
CPLAM4564		564	2250	7680	10.8 / 6.3	9.4 / 5.4	8.1	6.5	3.7 / 2.1		
CPLAM4625		625	2500	8532	12.0 / 7.0	10.4 / 6.0	9.0	7.2	4.2 / 2.4	3	
CPLAM4750		750	3000	10239	14.4 / 8.3	12.5 / 7.2	10.8	8.6	5.0 / 2.9		
CPLAM5125		125	624	2133	3.0 / -	2.6 / -	2.3	1.8	1.0 / -		
CPLAM5188	188	940	3208	4.5 / -	3.9 / -	3.4	2.7	1.6 / -			
CPLAM5250	250	1250	4266	6.0 / -	5.2 / -	4.5	3.6	2.1 / -			
CPLAM5375	5	375	1875	6400	9.0 / -	7.8 / -	6.8	5.4	3.1 / -	2	37
CPLAM5500		500	2500	8532	12.0 / -	10.4 / -	9.0	7.2	4.2 / -		
CPLAM5564		564	2820	9625	13.6 / 7.8	11.8 / 6.8	10.2	8.1	4.7 / 2.7		
CPLAM5625		625	3125	10665	15.0 / 8.7	13.0 / 7.5	11.3	9.0	5.2 / 3.0	3	
CPLAM5750		750	3750	12800	18.0 / 10.4	15.6 / 9.0	13.5	10.8	6.2 / 3.6		

## MODELS & SPECIFICATIONS | CPL SERIES (7" x 5" w/MULTIPLE ELEMENTS)

cont. from previous page

CATALOG NO	LENGTH (FT)	WATTS PER FT.	TOTAL HEATING CAPACITY		AMPS					NO. OF ELEMENTS	SHIP WT. (LBS)		
			TOTAL WATTS	BTU/HR	208V	240V	277V	347V	600V				
					(1 PH / 3 PH)	(1 PH / 3 PH)	(1 PH)	(1 PH)	(1 PH / 3 PH)				
CPLAM6125	6	125	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -	1	44		
CPLAM6188		188	1125	3840	5.4 / -	4.7 / -	4.1	3.2	1.9 / -				
CPLAM6250		250	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -				
CPLAM6375		375	2250	7680	10.8 / -	9.4 / -	8.1	6.5	3.7 / -	2			
CPLAM6500		500	3000	10,239	14.4 / -	12.5 / -	10.8	8.6	5.0 / -				
CPLAM6564		564	3380	11,535	16.3 / 9.4	14.1 / 8.1	12.2	9.7	5.6 / 3.2	3			
CPLAM6625		625	3750	12,800	18.0 / 10.4	15.6 / 9.0	13.5	10.8	6.2 / 3.6				
CPLAM6750		750	4500	15,358	21.6 / 12.5	18.8 / 10.8	16.2	12.9	7.5 / 4.3				
CPLAM8125		8	125	1000	3412	4.8 / -	4.2 / -	3.6	2.9	1.7 / -		1	58
CPLAM8188			188	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -			
CPLAM8250	250		2000	6824	9.6 / -	8.3 / -	7.2	5.8	3.3 / -				
CPLAM8375	375		3000	10,239	14.4 / -	12.5 / -	10.8	8.6	5.0 / -	2			
CPLAM8500	500		4000	13,652	19.2 / -	16.7 / -	14.4	11.5	6.7 / -				
CPLAM8564	564		4500	15,358	21.6 / 12.5	18.8 / 10.8	16.2	13.0	7.5 / 4.3	3			
CPLAM8625	625		5000	17,065	24.0 / 13.9	20.8 / 12.0	18.1	14.4	8.3 / 4.8				
CPLAM8750	750		6000	20,478	28.8 / 16.7	25.0 / 14.5	21.7	17.3	10.0 / 5.8				
CPLAM10125	10		125	1250	4266	6.0 / -	5.2 / -	4.5	3.6	2.1 / -	1	72	
CPLAM10188			188	1875	6400	9.0 / -	7.8 / -	6.8	5.4	3.1 / -			
CPLAM10250		250	2500	8532	12.0 / -	10.4 / -	9.0	7.2	4.2 / -				
CPLAM10375		375	3750	12,800	18.0 / -	15.6 / -	13.5	10.8	6.2 / -	2			
CPLAM10500		500	5000	17,065	24.0 / -	20.8 / -	18.1	14.4	8.3 / -				
CPLAM10564		564	5640	19,250	27.1 / 15.7	23.5 / 13.6	20.4	16.2	9.4 / 5.4	3			
CPLAM10625		625	6250	21,330	30.0 / 17.4	26.0 / 15.0	22.6	18.0	10.4 / 6.0				
CPLAM10750		750	7500	25,600	36.1 / 20.8	31.3 / 18.1	27.1	21.6	12.5 / 7.2				

NOTE: All models are NON-STOCK, MADE-TO-ORDER. When ordering, specify quantity, catalog number, voltage, wattage, optional controls, and color. Consult sales representative for lead times. **OPTIONAL CONTROLS ON PAGE 94.**

## ACCESSORIES / CPL SERIES

CATALOG NO	DESCRIPTION	COMPATIBLE WITH	SHIP WT. (LBS)	
CPLASBL21	28-Inch Blank Section	CPLSA Heaters	10	
CPLASBL31	3-Foot Blank Section		13	
CPLASBL41	4-Foot Blank Section		17	
CPLASBL51	5 Foot Blank Section		21	
CPLASBL61	6-Foot Blank Section	CPLSA Heaters	25	
CPLASBL81	8-Foot Blank Section		32	
CPLASBL101	10-Foot Blank Section		42	
CPLAMBL21	28-Inch Blank Section		CPLAM Heaters	14
CPLAMBL31	3-Foot Blank Section	18		
CPLAMBL41	4-Foot Blank Section	24		
CPLAMBL51	5 Foot Blank Section	30		
CPLAMBL61	6-Foot Blank Section	36		
CPLAMBL81	8-Foot Blank Section	48		
CPLAMBL101	10-Foot Blank Section	60		
CPLASPD2	Pedestal Leg Kit for 2, 3 & 4 ft. units	Legs must be ordered with CPLSA Heaters/Blanks		3
CPLASPD3	Pedestal Leg Kit for 5, 6 & 8 ft. units			4
CPLASPD4	Pedestal Leg Kit for 10 ft. unit			5
CPLAMPD2	Pedestal Leg Kit for 2, 3 & 4 ft. units		Legs must be ordered with CPLAM Heaters/Blanks	4
CPLAMPD3	Pedestal Leg Kit for 5, 6 & 8 ft. units	5		
CPLAMPD4	Pedestal Leg Kit for 10 ft. unit	7		
CPLASECR	Right Hand End Cap	CPLSA/CPLAM Heaters/Blanks		1
CPLAMECR	Right Hand End Cap		1	
CPLASECL	Left Hand End Cap	CPLSA/CPLAM Heaters/Blanks	1	
CPLAMECL	Left Hand End Cap		1	


NOTE: OPTIONAL CONTROLS ON PAGE 94. Outlet Mesh: Price per foot. 14-Gauge Front Cover: add 10% to heater price. Standard color included in base price. Other colors available. View paint policy on page 153. If color is not specified, front covers will be neutral grey. Back, grille, and accessories will be statutory bronze. When ordering, specify heater catalog number, voltage, phase, suffix catalog number for built-in controls, color, and options. Specify color for pedestal legs.

## CPL SERIES DECORATIVE PEDESTAL


### ACCESSORIES / CPL SERIES

CATALOG NO	COMPATIBLE WITH	HEIGHT (IN)	DEPTH (IN)	LENGTH (IN)	ADDT'L LENGTH* (IN)
<b>LEFT END CAPS</b>					
CSLASECL**	CPLAS	5-1/2	2-1/2	-	1/8
CSLAMECL**	CPLAM	7	4-3/4	-	1/8
<b>RIGHT END CAPS</b>					
CSLASECR**	CPLAS	5-1/2	2-1/2	-	1/8
CSLAMECR**	CPLAM	7	4-3/4	-	1/8
<b>PEDESTAL LEGS (FOR CPLAS HEATERS)</b>					
CPLASPD2**	2, 3, & 4 ft. heaters and blank sections				
CPLASPD3**	5, 6, & 8 ft. heaters and blank sections				
CPLASPD4**	10 ft. heaters and blank sections				
<b>PEDESTAL LEGS (FOR CPLAM HEATERS)</b>					
CPLAMPD2**	2, 3, & 4 ft. heaters and blank sections				
CPLAMPD3**	5, 6, & 8 ft. heaters and blank sections				
CPLAMPD4**	10 ft. heaters and blank sections				
<b>BLANK SECTIONS (CPLAS)</b>					
CPLASBL2	CPLAS	5-1/2	3	28	28
CPLASBL3				36	36
CPLASBL4				48	48
CPLASBL5				60	60
CPLASBL6				72	72
CPLASBL8				96	96
CPLASBL10				120	120
<b>BLANK SECTIONS (CPLAM)</b>					
CPLAMBL2	CPLAM	7	5	28	28
CPLAMBL3				36	36
CPLAMBL4				48	48
CPLAMBL5				60	60
CPLAMBL6				72	72
CPLAMBL8				96	96
CPLAMBL10				120	120


NOTE: \*Additional length the accessory adds to the total installation. \*\*Built-in duplex receptacle available.

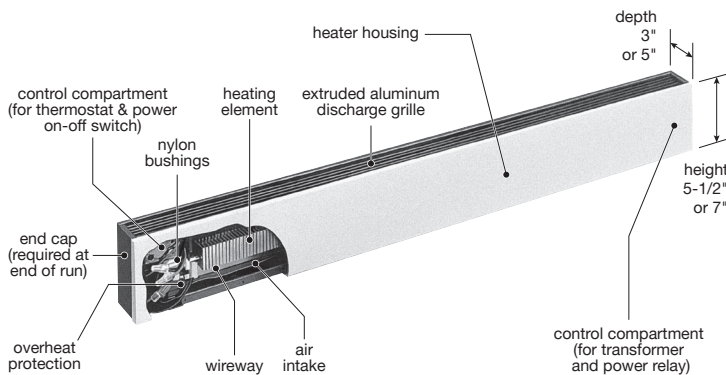


### SURFACE MOUNTED

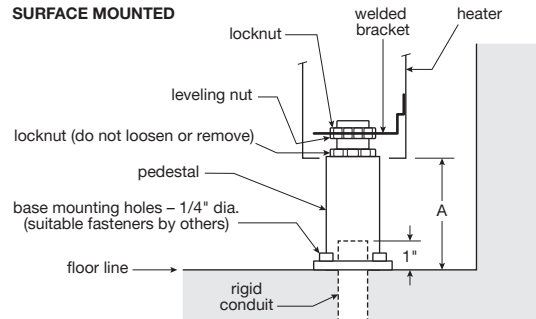

### IMBEDDED IN FLOOR

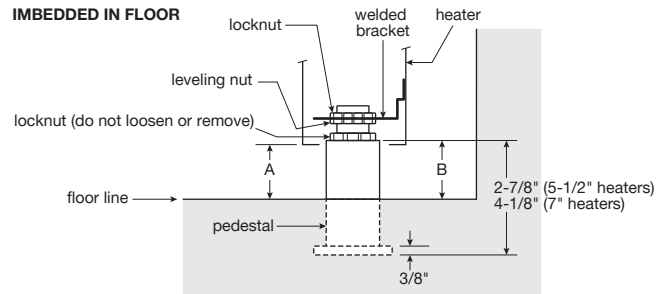


### PEDESTAL DETAILS

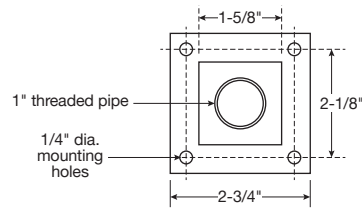


5-1/2 IN. HEATER PEDESTAL


### PEDESTAL LOCATION

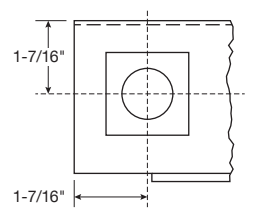

BOTTOM OF 5-1/2 IN. HEATER

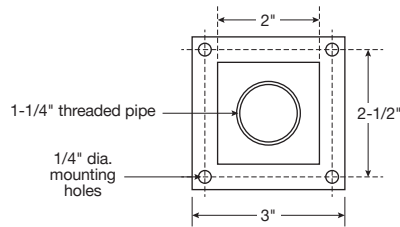

7 IN. HEATER PEDESTAL

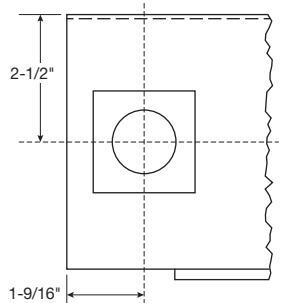

BOTTOM OF 7 IN. HEATER

### MOUNTING / CPL SERIES

HEATER CAPACITY (Watt/Ft.)	HEATER DIMENSION A (IN.) (Min. Mounting Height Above Floor)	PEDESTAL DIMENSION B (IN.) (Min. Height Above Floor)
125, 188 and 250	1-3/4	2
375, 500, 564, 625 and 750	3	3-1/4

### MOUNTING / CPL SERIES

CATALOG NO.	HEIGHT ABOVE FLOOR (IN.)	
	MIN.	MAX.
CPLAS	2-5/8	3-3/8
CPLAM	3-7/8	4-5/8