

CPL SERIES DECORATIVE PEDESTAL

MADE TO ORDER



IDEAL SPACES

- Institutional and Commercial
- Offices
- Hallways
- Lobbies
- Condos
- Conference Rooms
- Retail Spaces
- Terminals
- Other Areas without Wall Mounting Options

COLORS

- Beige
- Charcoal Gray
- White
- Aluminum
- Bronze
- Black
- Custom Colors Available

DIMENSIONS

- See Specifications

- CPL (Decorative) ideal for primary, secondary or supplemental heat where wall mounting is not viable
- Perfect for under-the-window heat loss and condensation prevention
- Durable front cover constructed of 16-gauge steel (optional 14-gauge available)
- Pedestal-mounted design; bottom inlet - top outlet
- Units may contain 1-3 heating elements that yield a broad range of heating capacity (see specifications)
- Optional 1/4 in. mesh located under the discharge grille to deter insertion of objects and restriction of airflow
- Blend into any décor with 8 standard color options or custom finishes available upon request
- Units can be mounted from wall-to-wall or as discrete units in standard lengths of 28 in. to 10 ft.
- Optional built-in controls include: line voltage thermostat (SPST or DPST); power on/off switch; power relay; or transformer relay (see specifications)
- Right- or left-hand entry/wiring flexibility with identical pre-wired junction boxes at either end
- Built-in wire way with factory-installed wiring rated 35 amps for CPLAS and 45 amps for CPLAM
- Easy connection of supply wiring from bottom, rear or end, as well as multiple wiring of adjacent heaters from one entry point
- For service, all internal parts are accessible by removing cover



CPL SERIES

DECORATIVE PEDESTAL

MODELS & SPECIFICATIONS / CPL SERIES (5-1/2" x 3" w/SINGLE ELEMENT)

CATALOG NO	LENGTH (FT)	WATTS PER FT.	TOTAL HEATING CAPACITY		AMPS						NO. OF ELEMENTS	SHIP WT. (LBS)
			TOTAL WATTS	BTU/HR	120V	208V	240V	277V	347V	600V		
CPLAS2125	2.3	125	250	853	2.1	1.2	1.0	0.9	0.7	0.4	1	11
CPLAS2188		188	375	1280	3.1	1.8	1.6	1.4	1.1	0.6		
CPLAS2250		250*	500	1706	4.2	2.4	2.1	1.8	1.4	0.8		
CPLAS3125	3	125	375	1280	3.1	1.8	1.6	1.4	1.1	0.6	1	15
CPLAS3188		188	546	1925	4.7	2.7	2.4	2.0	1.6	0.9		
CPLAS3250		250*	750	2560	6.2	3.6	3.1	2.7	2.2	1.2		
CPLAS4125	4	125	500	1706	4.2	2.4	2.1	1.8	1.4	0.8	1	18
CPLAS4188		188	750	2560	6.2	3.6	3.1	2.7	2.2	1.2		
CPLAS4250		250*	1000	3412	8.3	4.8	4.2	3.6	2.9	1.7		
CPLAS5125	5	125	625	2133	5.2	3.0	2.6	2.3	1.8	1.0	1	25
CPLAS5188		188	940	3208	7.8	4.5	3.9	3.4	2.7	1.6		
CPLAS5250		250*	1250	4266	10.4	6.0	5.2	4.5	3.6	2.1		
CPLAS6125	6	125	750	2560	6.2	3.6	3.1	2.7	2.2	1.2	1	29
CPLAS6188		188	1125	3840	9.4	5.4	4.7	4.1	3.2	1.9		
CPLAS6250		250*	1500	5120	12.5	7.2	6.3	5.4	4.3	2.5		
CPLAS8125	8	125	1000	3412	-	4.8	4.2	3.6	2.8	1.7	1	38
CPLAS8188		188	1500	5120	-	7.2	6.3	5.4	4.3	2.5		
CPLAS8250		250*	2000	6824	-	9.6	8.3	7.2	5.8	3.3		
CPLAS10125	10	125	1250	4266	-	6.0	5.2	4.5	3.6	2.1	1	47
CPLAS10188		188	1875	6400	-	9.0	7.8	6.8	5.4	3.1		
CPLAS10250		250*	2500	8532	-	12.0	10.4	9.0	7.2	4.2		

MODELS & SPECIFICATIONS | CPL SERIES (7" x 5" w/MULTIPLE ELEMENTS)

cont. on next page

CATALOG NO	LENGTH (FT)	WATTS PER FT.	TOTAL HEATING CAPACITY		AMPS					NO. OF ELEMENTS	SHIP WT. (LBS)		
			TOTAL WATTS	BTU/HR	208V (1 PH / 3 PH)	240V (1 PH / 3 PH)	277V (1 PH)	347V (1 PH)	600V (1 PH / 3 PH)				
CPLAM2125	2.3	125	250	853	1.2 / -	1.0 / -	0.9	0.7	0.4 / -	1	18		
CPLAM2188		188	375	1280	1.8 / -	1.6 / -	1.4	1.1	0.6 / -				
CPLAM2250		250	500	1706	2.4 / -	2.1 / -	1.8	1.4	0.8 / -				
CPLAM2375		2	375	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -			
CPLAM2500			500	1000	3412	4.8 / -	4.2 / -	3.6	2.9	1.7 / -			
CPLAM2564			564	1125	3840	5.4 / 3.1	4.7 / 2.7	4.1	3.2	1.9 / 1.1			
CPLAM2625		3	625	1250	4266	6.0 / 3.5	5.2 / 3.0	4.5	3.6	2.1 / 1.2			
CPLAM2750			750	1500	5120	7.2 / 4.2	6.3 / 3.6	5.4	4.3	2.5 / 1.4			
CPLAM3125			125	375	1280	1.8 / -	1.6 / -	1.4	1.1	0.6 / -			
CPLAM3188	3	188	564	1925	2.7 / -	2.4 / -	2.0	1.6	0.9 / -	1	22		
CPLAM3250		250	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -				
CPLAM3375		375	1125	3840	5.4 / -	4.7 / -	4.1	3.2	1.9 / -				
CPLAM3500		2	500	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -			
CPLAM3564			564	1690	5768	8.1 / 4.7	7.0 / 4.1	6.1	4.8	2.8 / 1.6			
CPLAM3625			625	1875	6400	9.0 / 5.2	7.8 / 4.5	6.8	5.4	3.1 / 1.8			
CPLAM3750		3	750	2250	7680	10.8 / 6.3	9.4 / 5.4	8.1	6.5	3.7 / 2.1			
CPLAM4125			125	500	1706	2.4 / -	2.1 / -	1.8	1.4	0.8 / -			
CPLAM4188			188	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -			
CPLAM4250	4	250	1000	3412	4.8 / -	4.2 / -	3.6	2.9	1.7 / -	1	29		
CPLAM4375		375	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -				
CPLAM4500		500	2000	6824	9.6 / -	8.3 / -	7.2	5.8	3.3 / -				
CPLAM4564		2	564	2250	7680	10.8 / 6.3	9.4 / 5.4	8.1	6.5	3.7 / 2.1			
CPLAM4625			625	2500	8532	12.0 / 7.0	10.4 / 6.0	9.0	7.2	4.2 / 2.4			
CPLAM4750			750	3000	10239	14.4 / 8.3	12.5 / 7.2	10.8	8.6	5.0 / 2.9			
CPLAM5125		5	125	624	2133	3.0 / -	2.6 / -	2.3	1.8	1.0 / -		1	37
CPLAM5188			188	940	3208	4.5 / -	3.9 / -	3.4	2.7	1.6 / -			
CPLAM5250			250	1250	4266	6.0 / -	5.2 / -	4.5	3.6	2.1 / -			
CPLAM5375	2		375	1875	6400	9.0 / -	7.8 / -	6.8	5.4	3.1 / -			
CPLAM5500			500	2500	8532	12.0 / -	10.4 / -	9.0	7.2	4.2 / -			
CPLAM5564			564	2820	9625	13.6 / 7.8	11.8 / 6.8	10.2	8.1	4.7 / 2.7			
CPLAM5625	3		625	3125	10665	15.0 / 8.7	13.0 / 7.5	11.3	9.0	5.2 / 3.0			
CPLAM5750			750	3750	12800	18.0 / 10.4	15.6 / 9.0	13.5	10.8	6.2 / 3.6			

MODELS & SPECIFICATIONS | CPL SERIES (7" x 5" w/MULTIPLE ELEMENTS)

cont. from previous page

CATALOG NO	LENGTH (FT)	WATTS PER FT.	TOTAL HEATING CAPACITY		AMPS					NO. OF ELEMENTS	SHIP WT. (LBS)
			TOTAL WATTS	BTU/HR	208V	240V	277V	347V	600V		
					(1 PH / 3 PH)	(1 PH / 3 PH)	(1 PH)	(1 PH)	(1 PH / 3 PH)		
CPLAM6125	6	125	750	2560	3.6 / -	3.1 / -	2.7	2.2	1.2 / -	1	44
CPLAM6188		188	1125	3840	5.4 / -	4.7 / -	4.1	3.2	1.9 / -		
CPLAM6250		250	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -		
CPLAM6375		375	2250	7680	10.8 / -	9.4 / -	8.1	6.5	3.7 / -	2	
CPLAM6500		500	3000	10,239	14.4 / -	12.5 / -	10.8	8.6	5.0 / -		
CPLAM6564		564	3380	11,535	16.3 / 9.4	14.1 / 8.1	12.2	9.7	5.6 / 3.2		
CPLAM6625		625	3750	12,800	18.0 / 10.4	15.6 / 9.0	13.5	10.8	6.2 / 3.6	3	
CPLAM6750		750	4500	15,358	21.6 / 12.5	18.8 / 10.8	16.2	12.9	7.5 / 4.3		
CPLAM8125		125	1000	3412	4.8 / -	4.2 / -	3.6	2.9	1.7 / -		
CPLAM8188	188	1500	5120	7.2 / -	6.3 / -	5.4	4.3	2.5 / -			
CPLAM8250	250	2000	6824	9.6 / -	8.3 / -	7.2	5.8	3.3 / -			
CPLAM8375	375	3000	10,239	14.4 / -	12.5 / -	10.8	8.6	5.0 / -	2		
CPLAM8500	500	4000	13,652	19.2 / -	16.7 / -	14.4	11.5	6.7 / -			
CPLAM8564	564	4500	15,358	21.6 / 12.5	18.8 / 10.8	16.2	13.0	7.5 / 4.3			
CPLAM8625	625	5000	17,065	24.0 / 13.9	20.8 / 12.0	18.1	14.4	8.3 / 4.8	3		
CPLAM8750	750	6000	20,478	28.8 / 16.7	25.0 / 14.5	21.7	17.3	10.0 / 5.8			
CPLAM10125	125	1250	4266	6.0 / -	5.2 / -	4.5	3.6	2.1 / -		1	
CPLAM10188	188	1875	6400	9.0 / -	7.8 / -	6.8	5.4	3.1 / -			
CPLAM10250	250	2500	8532	12.0 / -	10.4 / -	9.0	7.2	4.2 / -			
CPLAM10375	375	3750	12,800	18.0 / -	15.6 / -	13.5	10.8	6.2 / -	2		
CPLAM10500	500	5000	17,065	24.0 / -	20.8 / -	18.1	14.4	8.3 / -			
CPLAM10564	564	5640	19,250	27.1 / 15.7	23.5 / 13.6	20.4	16.2	9.4 / 5.4			
CPLAM10625	625	6250	21,330	30.0 / 17.4	26.0 / 15.0	22.6	18.0	10.4 / 6.0	3		
CPLAM10750	750	7500	25,600	36.1 / 20.8	31.3 / 18.1	27.1	21.6	12.5 / 7.2			

NOTE: All models are NON-STOCK, MADE-TO-ORDER. When ordering, specify quantity, catalog number, voltage, wattage, optional controls, and color. Consult sales representative for lead times. **OPTIONAL CONTROLS ON PAGE 94.**

ACCESSORIES / CPL SERIES

CATALOG NO	DESCRIPTION	COMPATIBLE WITH	SHIP WT. (LBS)
CPLASBL21	28-Inch Blank Section	CPLSA Heaters	10
CPLASBL31	3-Foot Blank Section		13
CPLASBL41	4-Foot Blank Section		17
CPLASBL51	5 Foot Blank Section		21
CPLASBL61	6-Foot Blank Section	CPLSA Heaters	25
CPLASBL81	8-Foot Blank Section		32
CPLASBL101	10-Foot Blank Section		42
CPLAMBL21	28-Inch Blank Section		CPLAM Heaters
CPLAMBL31	3-Foot Blank Section	18	
CPLAMBL41	4-Foot Blank Section	24	
CPLAMBL51	5 Foot Blank Section	30	
CPLAMBL61	6-Foot Blank Section	CPLAM Heaters	36
CPLAMBL81	8-Foot Blank Section		48
CPLAMBL101	10-Foot Blank Section		60
CPLASPD2	Pedestal Leg Kit for 2, 3 & 4 ft. units		Legs must be ordered with CPLSA Heaters/Blanks
CPLASPD3	Pedestal Leg Kit for 5, 6 & 8 ft. units	4	
CPLASPD4	Pedestal Leg Kit for 10 ft. unit	5	
CPLAMPD2	Pedestal Leg Kit for 2, 3 & 4 ft. units	Legs must be ordered with CPLAM Heaters/Blanks	
CPLAMPD3	Pedestal Leg Kit for 5, 6 & 8 ft. units		5
CPLAMPD4	Pedestal Leg Kit for 10 ft. unit		7
CPLASECR	Right Hand End Cap		CPLSA/CPLAM Heaters/Blanks
CPLAMECR	Right Hand End Cap	1	
CPLASECL	Left Hand End Cap	CPLSA/CPLAM Heaters/Blanks	1
CPLAMECL	Left Hand End Cap		1


NOTE: OPTIONAL CONTROLS ON PAGE 94. Outlet Mesh: Price per foot. 14-Gauge Front Cover: add 10% to heater price. Standard color included in base price. Other colors available. View paint policy on page 153. If color is not specified, front covers will be neutral grey. Back, grille, and accessories will be statutory bronze. When ordering, specify heater catalog number, voltage, phase, suffix catalog number for built-in controls, color, and options. Specify color for pedestal legs.

CPL SERIES DECORATIVE PEDESTAL


ACCESSORIES / CPL SERIES

CATALOG NO	COMPATIBLE WITH	HEIGHT (IN)	DEPTH (IN)	LENGTH (IN)	ADDT'L LENGTH* (IN)
LEFT END CAPS					
CSLASECL**	CPLAS	5-1/2	2-1/2	-	1/8
CSLAMECL**	CPLAM	7	4-3/4	-	1/8
RIGHT END CAPS					
CSLASECR**	CPLAS	5-1/2	2-1/2	-	1/8
CSLAMECR**	CPLAM	7	4-3/4	-	1/8
PEDESTAL LEGS (FOR CPLAS HEATERS)					
CPLASPD2**	2, 3, & 4 ft. heaters and blank sections				
CPLASPD3**	5, 6, & 8 ft. heaters and blank sections				
CPLASPD4**	10 ft. heaters and blank sections				
PEDESTAL LEGS (FOR CPLAM HEATERS)					
CPLAMPD2**	2, 3, & 4 ft. heaters and blank sections				
CPLAMPD3**	5, 6, & 8 ft. heaters and blank sections				
CPLAMPD4**	10 ft. heaters and blank sections				
BLANK SECTIONS (CPLAS)					
CPLASBL2	CPLAS	5-1/2	3	28	28
CPLASBL3				36	36
CPLASBL4				48	48
CPLASBL5				60	60
CPLASBL6				72	72
CPLASBL8				96	96
CPLASBL10				120	120
BLANK SECTIONS (CPLAM)					
CPLAMBL2	CPLAM	7	5	28	28
CPLAMBL3				36	36
CPLAMBL4				48	48
CPLAMBL5				60	60
CPLAMBL6				72	72
CPLAMBL8				96	96
CPLAMBL10				120	120


NOTE: *Additional length the accessory adds to the total installation. **Built-in duplex receptacle available.

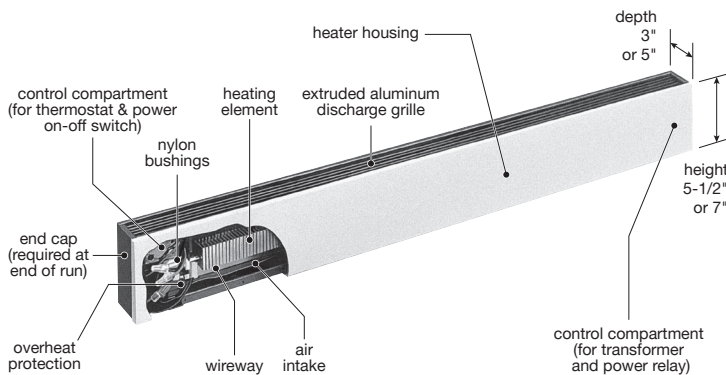


SURFACE MOUNTED

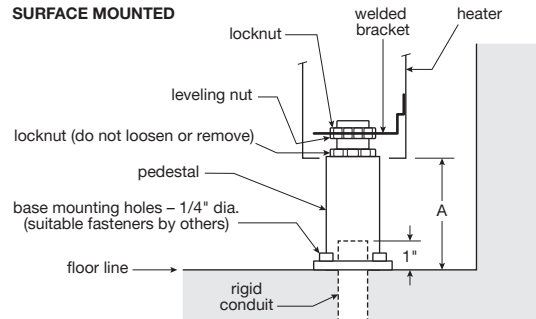




IMBEDDED IN FLOOR

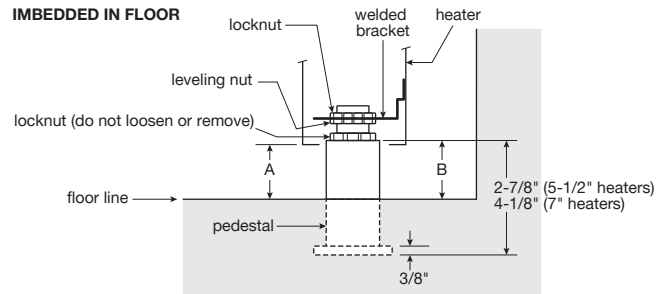

PEDESTAL DETAILS

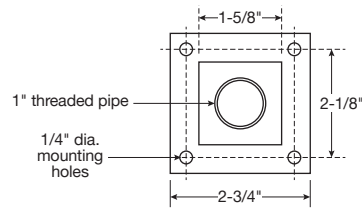

PEDESTAL LOCATION

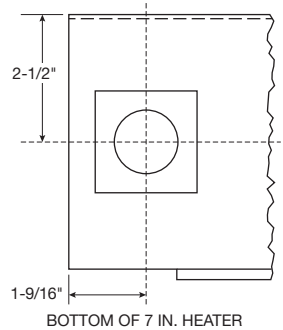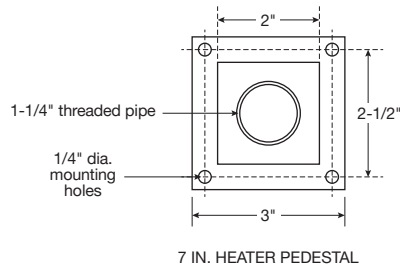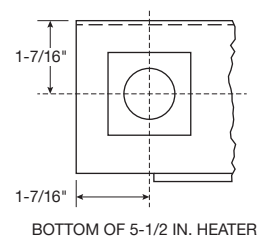

MOUNTING / CPL SERIES

HEATER CAPACITY (Watt/Ft.)	HEATER DIMENSION A (IN.) (Min. Mounting Height Above Floor)	PEDESTAL DIMENSION B (IN.) (Min. Height Above Floor)
125, 188 and 250	1-3/4	2
375, 500, 564, 625 and 750	3	3-1/4

MOUNTING / CPL SERIES

CATALOG NO.	HEIGHT ABOVE FLOOR (IN.)	
	MIN.	MAX.
CPLAS	2-5/8	3-3/8
CPLAM	3-7/8	4-5/8