

CSL SERIES


Decorative Sill-Height Steel Convector

CONVECTORS




Ideal Spaces:


Offices
Hallways
Lobbies
Retail Spaces
Terminals
Commercial /
Institutional Spaces with
Floor-to-Ceiling Windows



White



Beige




Charcoal Grey



Bronze



Black



Aluminum



Custom and/or Anodized
Colors also Available

- › Perfect for under-the-window heat loss and condensation prevention
- › Durable front cover constructed of 16-gauge steel (optional 14-gauge available)
- › Wall-mounted design with extruded aluminum; bottom or front inlet - top outlet discharge grille
- › Units may contain 1-3 heating elements that yield a broad range of heating capacity (see specifications)
- › Optional ¼ in. mesh located under the discharge grille to deter insertion of objects and restriction of airflow
- › Blend into any décor with 8 standard color options or custom finishes available upon request
- › Units can be mounted from wall-to-wall or as discrete units in standard lengths of 28 in. to 10 ft.
- › Locate at sill height (or lower) or run from mullion-to-mullion
- › Optional built-in controls include: line voltage thermostat (SPST or DPST); two-stage thermostat; power on/off switch; transformer relay; and power relay (see specifications)
- › Right- or left-hand entry/wiring flexibility with identical pre-wired junction boxes at either end
- › End-to-End wire-way provided for ease of wiring; and rated per the NEC conduit size and rating codes. Please consult factory for proper sizing and specifications
- › Easy connection of supply wiring from bottom, rear or end, as well as multiple wiring of adjacent heaters from one entry point
- › For service, all internal parts are accessible by removing cover



CSL SERIES

Decorative Sill-Height Steel Convactor

5 1/2" x 3" — Single Element

Lengths

| Length | 28" | 3' | 4' | 5' | 6' | 8' | 10' |
|-----------------|--------|--------|--------|--------|--------|--------|--------|
| Shipping Weight | 11 lbs | 15 lbs | 18 lbs | 25 lbs | 29 lbs | 38 lbs | 47 lbs |

NOTE: All models are NON-STOCK, MADE-TO-ORDER. When ordering, specify quantity, catalog number, voltage, wattage, optional controls, and color. Consult sales representative for lead times.

Watts per Ft.*

| | |
|-----|-----|
| 125 | 188 |
| 250 | |

*Specs vary by length. Refer to the submittal sheet for full details.

Voltages*

| | | |
|-----|-----|-----|
| 120 | 208 | 240 |
| 277 | 347 | 600 |

7" x 5" & 14" x 5" — Multiple Elements

Lengths

| Length | | 28" | 3' | 4' | 5' | 6' | 8' | 10' |
|-----------------|----------|--------|--------|--------|--------|--------|--------|---------|
| Shipping Weight | 7" x 5" | 17 lbs | 21 lbs | 28 lbs | 35 lbs | 42 lbs | 56 lbs | 70 lbs |
| | 14" x 5" | 25 lbs | 32 lbs | 42 lbs | 53 lbs | 60 lbs | 80 lbs | 100 lbs |

NOTE: All models are NON-STOCK, MADE-TO-ORDER. When ordering, specify quantity, catalog number, voltage, wattage, optional controls, and color. Consult sales representative for lead times. 375 to 750 watts per foot units can be positioned to within 3 in. of floor; 5 1/2 in. and 7 in. high models are available with top outlet only. 14 in. models are available with top or front outlet.

Watts per Ft.*

| 1 Element* | 125 | 188 | 250 |
|-------------|-----|-----|-----|
| 2 Elements* | 375 | 500 | |
| 3 Elements* | 564 | 625 | 750 |

*Specs vary by length. Refer to the submittal sheet for full details.

Voltages*

| Single Phase* | 208 | 240 | 277 |
|---------------|-----|-----|-----|
| | 347 | 600 | |
| Three Phase* | 208 | 240 | 600 |

Optional Accessories:


| CATALOG NO. | COMPATIBLE WITH | HEIGHT | DEPTH | LENGTH | SHIP WT. |
|-------------|-----------------|--------|-------|--------|----------|
| CSLASBL2* | CSLAS | 5 1/2" | 3" | 28" | 10 lbs |
| CSLASBL3* | | | | 3' | 13 lbs |
| CSLASBL4* | | | | 4' | 17 lbs |
| CSLASBL5* | | | | 5' | 21 lbs |
| CSLASBL6* | | | | 6' | 25 lbs |
| CSLASBL8* | | | | 8' | 32 lbs |
| CSLASBL10* | | | | 10' | 42 lbs |
| CSLAMBL2* | CSLAM | 7" | 5" | 28" | 14 lbs |
| CSLAMBL3* | | | | 3' | 18 lbs |
| CSLAMBL4* | | | | 4' | 24 lbs |
| CSLAMBL5* | | | | 5' | 30 lbs |
| CSLAMBL6* | | | | 6' | 36 lbs |
| CSLAMBL8* | | | | 8' | 48 lbs |
| CSLAMBL10* | | | | 10' | 60 lbs |
| CSLALBL2* | CSLAL | 14" | 5" | 28" | 22 lbs |
| CSLALBL3* | | | | 3' | 29 lbs |
| CSLALBL4* | | | | 4' | 38 lbs |
| CSLALBL5* | | | | 5' | 48 lbs |
| CSLALBL6* | | | | 6' | 57 lbs |
| CSLALBL8* | | | | 8' | 76 lbs |
| CSLALBL10* | | | | 10' | 95 lbs |

Outlet Mesh: Price per foot. 14-Gauge Front Cover: add 10% to heater price. Standard color included in base price. Other colors available. See paint policy page for information on custom paint colors. Maximum of 250 watts per ft. on front outlet models. When ordering, specify heater catalog number, voltage, phase, suffix catalog number for built-in controls, color, and options. 2. If color is not specified, front covers will be Beige. Front outlet models available only in 14 in. height and 125, 188 and 250 Wt./Ft. configuration. Outlet mesh is not available on front outlet models.

*Additional length the accessory adds to the total installation length. **Built-in duplex receptacle available. Add model numbers suffix "-I" for bottom inlet - top outlet; add suffix "-3" for bottom inlet - front outlet.

Reference Marley Catalog and Submittals for additional control option details.


Dimensions and Clearances:

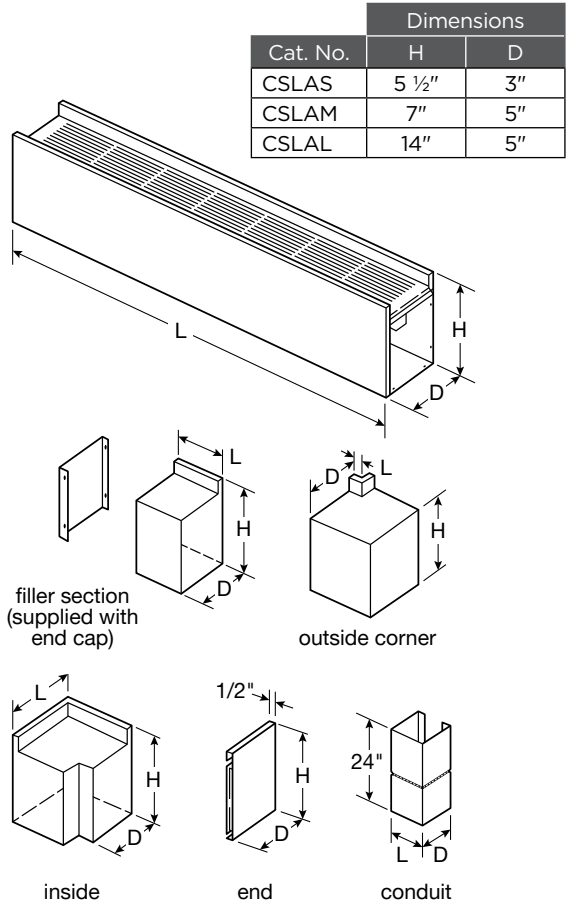

CSL SERIES

Decorative Sill-Height Steel Convactor

Scan the QR code
to access additional
specs and features





Optional Accessories:

| CATALOG NO. | | COMPATIBLE WITH | HEIGHT | DEPTH | LENGTH | ADDITIONAL LENGTH | SHIP WT. | |
|--------------------|-------------|-----------------|--------|-------|--------|-------------------|----------|-------|
| END CAPS | LEFT | CSLASECL** | CSLAS | 5 ½" | 2 ½" | - | ⅛" | 1 lbs |
| | | CSLAMECL** | CSLAM | 7" | 4 ¼" | | | 1 lbs |
| | | CSLALACL** | CSLAL | 14" | 4 ¼" | | | 1 lbs |
| | RIGHT | CSLASECR** | CSLAS | 5 ½" | 2 ½" | - | ⅛" | 1 lbs |
| | | CSLAMECR** | CSLAM | 7" | 4 ¼" | | | 1 lbs |
| | | CSLALACR** | CSLAL | 14" | 4 ¼" | | | 1 lbs |
| FILLER SECTIONS | CSLASFL3 | CSLAS | 5 ½" | 5 ⅝" | 4 | 0-3 | 1 lbs | |
| | CSLAMFL3 | CSLAM | 7" | 6 ⅝" | | | 2 lbs | |
| | CSLALFL3 | CSLAL | 14" | 13 ⅝" | | | 3 lbs | |
| | CSLASFL6** | CSLAS | 5 ⅝" | 2 ½" | 7 | 3-6 | 2 lbs | |
| | CSLAMFL6** | CSLAM | 6 ⅝" | 4 ½" | | | 3 lbs | |
| | CSLALFL6** | CSLAL | 13 ⅝" | 4 ½" | | | 5 lbs | |
| | CSLASFL9** | CSLAS | 5 ⅝" | 2 ½" | 10 | 6-9 | 3 lbs | |
| | CSLAMFL9** | CSLAM | 6 ⅝" | 4 ½" | | | 4 lbs | |
| | CSLALFL9** | CSLAL | 13 ⅝" | 4 ½" | | | 6 lbs | |
| | CSLASFL12** | CSLAS | 5 ⅝" | 2 ½" | 13 | 9-12 | 4 lbs | |
| | CSLAMFL12** | CSLAM | 6 ⅝" | 4 ½" | | | 5 lbs | |
| | CSLALFL12** | CSLAL | 13 ⅝" | 4 ½" | | | 8 lbs | |
| | CSLASFL18** | CSLAS | 5 ⅝" | 2 ½" | 19 | 15-18 | 5 lbs | |
| | CSLAMFL18** | CSLAM | 6 ⅝" | 4 ½" | | | 6 lbs | |
| | CSLALFL18** | CSLAL | 13 ⅝" | 4 ½" | | | 9 lbs | |
| CORNERS | INSIDE | CSLASIC | CSLAS | 5 ⅝" | 2 ½" | 4 ½" | 3-3 ½" | 2 lbs |
| | | CSLAMIC | CSLAM | 6 ⅝" | 4 ½" | 6" | 5-5 ½" | 4 lbs |
| | | CSLALIC | CSLAL | 13 ⅝" | 4 ½" | 6" | 5-5 ½" | 6 lbs |
| | OUTSIDE | CSLASOC | CSLAS | 5 ⅝" | 2 ½" | 1" | 0-½" | 1 lbs |
| | | CSLAMOC | CSLAM | 6 ⅝" | 4 ½" | | | 2 lbs |
| | | CSLALOC | CSLAL | 13 ⅝" | 4 ½" | | | 4 lbs |
| | CONDUIT | CSLASCC | CSLAS | - | 2 ⅝" | 2 ½" | - | 4 lbs |
| | | CSLAMCC | CSLAM | - | - | - | - | 5 lbs |
| STAND-OFF BRACKETS | SO1 | CSLAS | 4 ¾" | ¾" | 3" | - | 1 lbs | |
| | SO2 | CSLAM | 6 ¾" | ¾" | 3" | - | 1 lbs | |

All steel convectors come standard with end caps. All pedestal style steel convectors come standard with pedestals. Outlet Mesh: Price per foot. 14-Gauge Front Cover: add 10% to heater price. Standard color included in base price. Other colors available. See paint policy page for information on custom paint colors. Maximum of 250 watts per ft. on front outlet models. When ordering, specify heater catalog number, voltage, phase, suffix catalog number for built-in controls, color, and options. 2. If color is not specified, front covers will be Beige. Front outlet models available only in 14 in. height and 125, 188 and 250 Wt./Ft. configuration. Outlet mesh is not available on front outlet models.

* Additional length the accessory adds to the total installation length. ** Built-in duplex receptacle available. Add model numbers suffix "-1" for bottom inlet - top outlet; add suffix "-3" for bottom inlet - front outlet.

Typical Installation

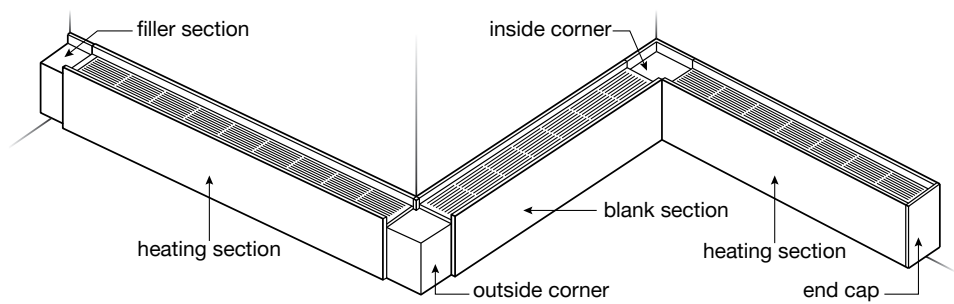

Front Outlet Model
Front outlet is available on Catalog No. CSLAL heaters only, in 125, 188, and 250 watts/foot configuration. Outlet mesh is not available on front outlet models.