

IHD SERIES

INDUSTRIAL HIGH-EFFICIENCY CEILING FAN



IDEAL SPACES

- Classrooms
- Offices
- Retail Stores
- Restaurants
- Lobbies
- Gyms
- Factories
- Warehouses

COLORS

- White
- Brown (Select Models)

DIMENSIONS

- 36–60" wide

TECHNICAL SPECIFICATIONS

- Motor:
 - 18 pole, 120V and 277V
 - Permanently sealed double ball bearing
- Blades: White, epoxy finished steel
 - Included Accessories for installation: Locking J-Hook 3/8" x 7" x 1/4"



Industrial fans circulate large volumes of air from above the floor to keep occupants, workstations and machinery at comfortable temperatures during both hot and cold weather seasons. These fans use powerful, heavy-duty motors for ceiling installation up to 45 feet (56" fans)–75 feet (60" fans) in height. These fans are ideal for large spaces where sound is not a primary concern.

Summer Usage

- Keep occupants and machinery cooler in hot summer months by running the fan in a clockwise direction to create a mild windchill effect
- Open up floor space by removing the need for multiple fans and cords at user-level and creating a safer work environment for occupants



IHD SERIES INDUSTRIAL HIGH-EFFICIENCY CEILING FAN

Models & Specifications:

CATALOG NO.		UPC	FAN TYPE	VOLTAGE	FAN SIZE (WIDTH)	CFM/WATTS	CFM	WATTS	EYEC**
FAN & CONTROLLER KIT	FAN ONLY								
56001HPK	56001HP	00685360174464	High Performance Industrial	120	56"	102	6561	64.3	\$18.00
56001BRNHPK	56001HP-BRN	00685360174488	High Performance Industrial	120	56"	102	6561	64.3	\$18.00
56007HPK	56007HP	00685360174563	High Performance Industrial	277	56"	85.3	8959	105	\$20.00
60001HPK	60001HP	00685360174501	High Performance Industrial	120	60"	86.5	6090	70.4	\$18.00
60001BRNHPK	60001HP-BRN	00685360174525	High Performance Industrial	120	60"	86.5	6090	70.4	\$18.00

All products with the suffix "K" include a speed control. 12003 is used for 120V applications and 27708 is used for 277V applications.

All above products include 24" downrod.

* Effective amount of air volume moved past a plane 20ft. from fan. All specifications subject to change and improvement.


Optional Accessories

CATALOG NO	DESCRIPTION	SHIP WT.
9B24BW	Downrod 24"—White	2 lbs
9B24BB	Downrod 24"—Brown	2 lbs
9D08	Downrod 8"—White	1 lbs


Secondary Control Options for New Construction Applications: ***

CATALOG NO	DESCRIPTION	VOLTAGE	AMPERAGE	SHIP WT.	QTY OF FANS CONTROLLED PER MODEL #			
					36201C	48201C	56001LCC	56201CLS
12003	Speed Control	120	3	2 lbs	3	2	2	2
12006	Speed Control	120	6	2 lbs	7	5	5	5
12008	Speed Control	120	8	2 lbs	10	6	6	6
12012	Speed Control	120	12	2 lbs	12	10	10	10
12001N	Speed Control, Noiseless	120	1	2 lbs	—	1	—	—
12005N	Speed Control, Noiseless	120	5	2 lbs	—	2	2	—


Before purchasing this appliance, read important information about its estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer at MarleyMEP.com/Resource-Library

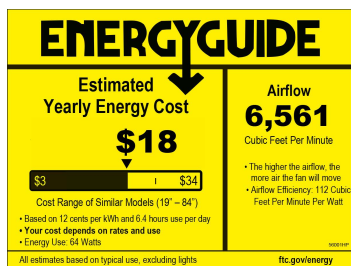

3502-11291-00 - 56001HP

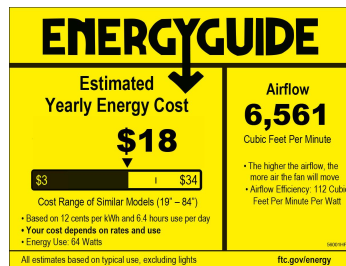

3502-11292-000 - 60001HP

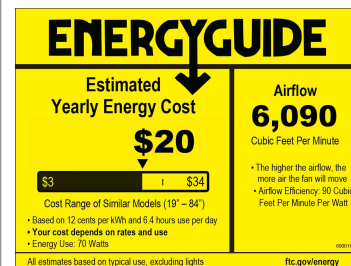

3502-11294-000 - 56007HP