

CRN SERIES

INDUSTRIAL PERMANENT INFRARED HEATER



IDEAL SPACES

- Wastewater Treatment Plants
- Loading Docks
- Foundries
- Auto or Marine Repair Facilities
- Walkways
- Assembly Areas
- Enclosed Smoking Areas
- Indoor/Outdoor Storage Areas

ENCLOSURE TYPE



- Extruded Aluminum

ELEMENT TYPE*

- Metal Sheath

REFLECTIVE ANGLE

- 90° Symmetrical

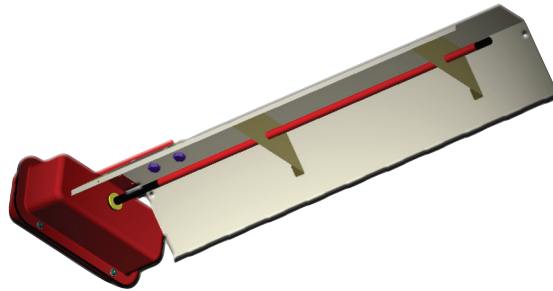

- Ideal for permanent spot heating where dependence on air movement is impractical
- High-watt density and industrial design provides a durable source of heat
- Optional safety grilles are available
- Highly polished aluminum reflector extends over the assembly to provide a uniform heating pattern
- Heating element connects to a sealed, moisture-resistant terminal enclosure allowing unit to be washed down

NOTE: *Metal Sheathed: used indoors or outdoors in high-traffic areas. Maintain at least 5 ft. in radiant path, between bottom of heater and combustible material. Pigtail element leads for a more positive connection in high-traffic areas where physical abuse.



CRN SERIES

INDUSTRIAL PERMANENT INFRARED HEATER

MODELS & SPECIFICATIONS

CATALOG NO.	UPC	WATTS	VOLTS	PHASE	REFLECTIVE ANGLE	ELEMENT TYPE	SHIP WT. (LBS)						
CRN1011	6 85360 14340 8	1,000	120	1	90° Symm	Metal Sheath	10						
CRN1081	6 85360 14341 5		208										
CRN1021	6 85360 14342 2		240										
CRN1511	6 85360 14343 9	1,500	120				90° Symm	Metal Sheath	15				
CRN1581	6 85360 14344 6		208										
CRN1521	6 85360 14345 3		240										
CRN1571	6 85360 14346 0		277										
CRN1531	6 85360 14347 7	2,000	347						90° Symm	Metal Sheath	18		
CRN2001	6 85360 14348 4		208										
CRN2021	6 85360 14349 1		240										
CRN2071	6 85360 14350 7		277										
CRN2031	6 85360 14351 4	2,500	347								90° Symm	Metal Sheath	20
CRN2501	6 85360 14352 1		208										
CRN2521	6 85360 14353 8		240										
CRN2571	6 85360 14354 5		277										
CRN2531	6 85360 14355 2		347										

