


ELECTRIC DUCT HEATER

OPEN COIL



IDEAL SPACES

- Office Buildings
- Retail Stores
- Warehouses
- Schools
- Hotels
- Hospitals

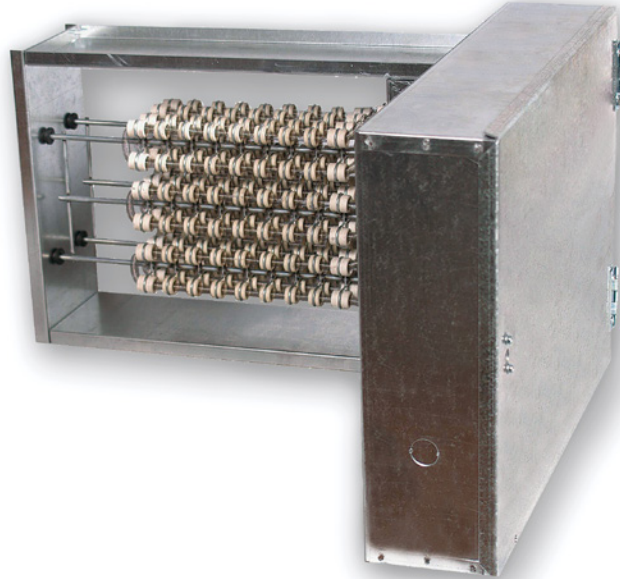

KEY FEATURES

- UL and ETL Listed for use as a standalone heater
- Flip-Able design, airflow in any direction, designed for zero clearance
- Standard Watt density of 30 kW/sqft
- Derated Heating Coils improve heater element life and nuisance tripping
- Max width of 24" and max height of 18"
- Variable CFM requirement based on inlet air temp
- Convenient online quoting through updated Configurator; saves time and money

OPTIONS & ACCESSORIES

- Precise solid state SSR/SCR Control
- NEC compliant Disconnect Switch
- Integrated 24V Transformer eliminates control wire runs
- Airflow Switch is an air pressure device designed to disable the heater when the system has no or low airflow
- Wall Thermostat for easy room temperature control



www.qmarkmep.com

For Technical Services, Call 800-642-4328

ITEM# QFLY_OPENDUCT_0420-1

