


PROJECT _____	ENGINEER _____	SUBMITTED BY _____
DATE _____	ARCHITECT _____	NOTES: _____
SHEET _____ OF _____	CONTRACTOR _____	NOTES: _____

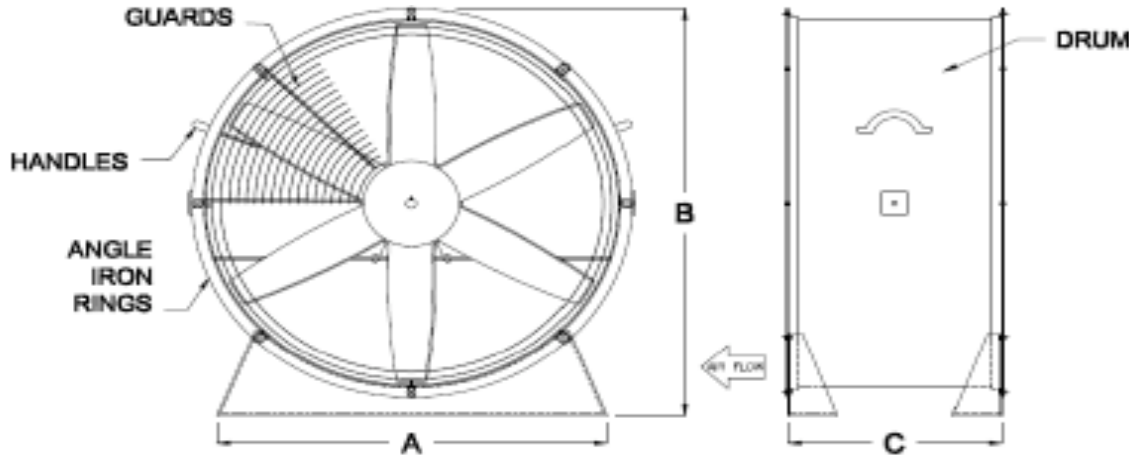

**Specifications:**

18" to 48" sizes available with 115/230V, 60HZ, 1 PH or 230/460V, 60 HZ, 3 PH totally enclosed or explosion motors.

Non-sparking cast aluminum blades.

Rugged, heavy duty 14 gauge steel body with industrial grey enamel coating.

Meets Federal OSHA requirements.

1 year limited warranty.

**Options Available:**

Acid resistant coating and manual starter switch.  
Call factory. Add EXP suffix to model number when ordering explosion proof models.

**Accessories:**

Casters (2 Fixed and 2 Swivel) Factory Installed.

Blade	A	B	C
18"	18"	21-1/2"	20"
24"	24"	27-1/2"	20"
30"	27"	33-1/2"	20"
36"	30"	39-1/2"	20"
42"	34"	45-1/2"	20"
48"	36"	52"	20"

ITEM	QTY.	MARK	MODEL NUMBER	BLADE DIA.	TOTAL HEIGHT	MOTOR HP	VOLTS	PHASE	MOTOR TYPE TE / EXP	RPM	CFM @ 0" SP	APPROX. WEIGHT