

## CHD SERIES

### Commercial High-Efficiency Ceiling Fan

## CEILING FANS




#### *Technical Specifications:*

**Dimensions:** 36-56" wide

#### *Ideal Spaces:*

Classrooms  
Offices  
Retail Stores  
Restaurants  
Lobbies  
Gyms  
Factories  
Warehouses



White

Commercial fans circulate large volumes of air from above the floor to keep occupants, workstations and machinery at comfortable temperatures during both hot and cold weather seasons. Well suited for applications where quiet operation is desired and/or lower ceilings are prevalent.

#### **Summer Usage**

- › Keep occupants and machinery cooler in hot summer months by running the fan in a clockwise direction to create a mild windchill effect
- › Control speed and direction of fan via the unitary control for optimum effect
- › Open up floor space by removing the need for multiple fans and cords at user-level and creating a safer work environment for occupants

#### **Winter Usage**


- › Heat Destratification effect: Using the reversible control, run fan in counter-clockwise direction to bring warm air down from high ceilings to occupant and machinery level
- › Reduces load on overall HVAC system to maintain heat envelope of facility and reducing overall energy and equipment maintenance costs



# CHD SERIES

## Commercial High-Efficiency Ceiling Fan

Scan the QR code  
to access additional  
specs and features



18 Pole 115V; reversible motor. Permanently sealed double-ball bearing motor.  $\frac{3}{8}$ " x 7  $\frac{1}{4}$ " locking J-hook for installation. White epoxy finish. Steel blades. Provides superior air velocity and efficiency.

### Models & Specifications:

	CATALOG NO.		UPC	FAN TYPE	VOLTAGE	FAN SIZE (WIDTH)	CFM/ WATTS	CFM	WATTS	EYEC**
	FAN & CONTROLLER KIT	FAN ONLY								
◆	36201K	36201C	685360173788	High Efficiency	120	36"	64.0	2126	33.2	\$9.30
◆	48201K	48201C	685360173801	High Efficiency	120	48"	85.6	3861	45.1	\$12.60
◆	56001LCC*	56001LCC*	685360173702	High Efficiency/Low Ceilings	120	56"	87.8	4952	56.4	\$15.80
◆	56201CLS*	56201CLS*	685360174556	High Efficiency/Low Speed	120	56"	81.0	5436	67.1	\$18.80

SKU Legend: ◆ = Popular Products; ● = Extended Offering

Note: All above products include 24" downrod, except for the 56201 model which comes standard with a 16" downrod. All products with the suffix "K" include the CTL12004RSPD reversible speed control.

\*Effective amount of air volume moved past a plane 20ft. from fan. All specifications subject to change and improvement. \*\* Estimated Yearly Energy Cost based on ENERGY GUIDE standards

### Optional Accessories:

CATALOG NO	DESCRIPTION	SHIP WT.
9D12BW	Downrod 12" — White	2 lbs
9D24BW	Downrod 24" — White	2 lbs
9D36BW	Downrod 36" — White	2 lbs
9D48BW	Downrod 48" — White	2 lbs
CTL12004RSPD	Controller—Reversible & Speed Control, 4 Fans, 120v	1 lbs


NOTE: For Brown Downrods, replace "BW" with "BB" (i.e. 9D24BW or 9D24BB)

### Secondary Control Options for New Construction Applications:


					Model Fan and Quantity per Control			
CATALOG NO	DESCRIPTION	VOLTAGE	AMPERAGE	SHIP WT.	36201C	48201C	56001LCC	56201CLS
12005	Speed Control	120	5	2 lbs	3	2	2	2
12006	Speed Control	120	6	2 lbs	7	5	5	5
12008	Speed Control	120	8	2 lbs	10	6	6	6
12012	Speed Control	120	12	2 lbs	12	10	10	10

NOTE: Choosing a secondary control removes the ability for fan to be used in reverse. If speed control and reversibility are needed please use the CTL12004RSPD


Before purchasing this appliance, read important information about it's estimated annual energy consumption, yearly operating cost, or energy efficiency rating that is available from your retailer at MarleyMEP.com/Resource-Library

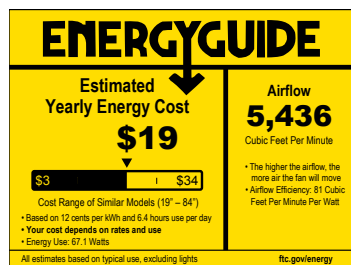


56201CLS



36201C



48201C

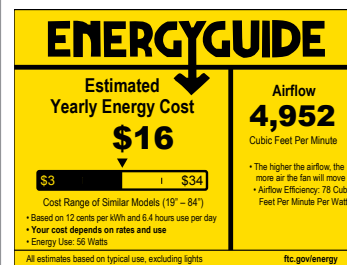

56001LCC