

CP SERIES

Radiant Ceiling Panel

RADIANT HEATERS




Technical Specifications:

Dimensions: 2'x2' 2'x4' and
Custom Sizing Available

Ideal Spaces:

Living/Family Room
Offices & Retail Spaces
Hallways & Lobbies
Conference Rooms
Locker Rooms & Bathrooms
Laboratories
Yoga Studios
Bedrooms & Basements



White



Custom Colors and
Silkscreens Available


- › Provides clean, gentle, quiet heat,
- › Efficient heat solution to heat people and objects — not surrounding air
- › Three mounting options fit nearly any ceiling space and keep your floors and walls free of clutter
- › Energy Saving — Increases HVAC efficiency and longevity using this spot heat solution
- › No moving parts for low maintenance, peace of mind operation
- › Full line of custom panels available upon request (see specifications on next page)
- › Encapsulated casted element assures uniform temperatures across surface and unit longevity
- › All panels come standard with combination Earthquake/T-bar grip clips
- › Hanging Clips provide holes for support chains, or can be folded over T-Bar to reduce lateral movement
- › Constructed of fire retardant materials; no fire or hazardous rating



CP SERIES

Radiant Ceiling Panel

Scan the QR code
to access additional
specs and features



Models & Specifications:

ITEM INFORMATION			ELECTRICAL DATA				DIMENSIONAL DATA	
	CATALOG NO.	UPC	VOLTS	WATTS	BTU/HR.	AMPS	SIZE	SHIP WT.
◆	CP371F	685360168821	120	375	1280	3.1	2' x 2'	15 lbs
◆	CP378F	685360168838	208	375	1280	1.8	2' x 2'	15 lbs
◆	CP372F	685360168845	240	375	1280	1.6	2' x 2'	15 lbs
◆	CP501F	685360168869	120	500	1706	4.2	2' x 4'	28 lbs
◆	CP508F	685360168876	208	500	1706	2.4	2' x 4'	28 lbs
◆	CP502F	685360168883	240	500	1706	2.1	2' x 4'	28 lbs
◆	CP621F	685360168913	120	625	2133	5.2	2' x 4'	28 lbs
◆	CP628F	685360168920	208	625	2133	3.0	2' x 4'	28 lbs
◆	CP622F	685360168937	240	625	2133	2.6	2' x 4'	28 lbs
◆	CP751F	685360168968	120	750	2559	6.3	2' x 4'	28 lbs
◆	CP758F	685360168975	208	750	2559	3.6	2' x 4'	28 lbs
◆	CP752F	685360168982	240	750	2559	3.1	2' x 4'	28 lbs
●	CP251F	685360168739	120	250	853	2.1	2' x 2'	15 lbs
●	CP258F	685360168746	208	250	853	1.2	2' x 2'	15 lbs
●	CP252F	685360168753	240	250	853	1.0	2' x 2'	15 lbs
●	CP257F	685360168760	277	250	853	0.9	2' x 2'	15 lbs
●	CP311F	685360168784	120	310	1058	2.6	2' x 2'	15 lbs
●	CP318F	685360168791	208	310	1058	1.5	2' x 2'	15 lbs
●	CP312F	685360169019	240	310	1058	1.3	2' x 2'	15 lbs
●	CP317F	685360168807	277	310	1058	1.1	2' x 2'	15 lbs
●	CP377F	685360169026	277	375	1280	1.4	2' x 2'	15 lbs
●	CP507F	685360168890	277	500	1706	1.8	2' x 4'	28 lbs
●	CP627F	685360168944	277	625	2133	2.3	2' x 4'	28 lbs
●	CP757F	685360168999	277	750	2559	2.7	2' x 4'	28 lbs
●	CP253F	685360168777	347	250	853	0.7	2' x 2'	15 lbs
●	CP313F	685360168814	347	310	1058	0.9	2' x 2'	15 lbs
●	CP373F	685360168852	347	375	1280	1.1	2' x 2'	15 lbs
●	CP503F	685360168906	347	500	1706	1.4	2' x 4'	28 lbs
●	CP623F	685360168951	347	625	2133	1.8	2' x 4'	28 lbs
●	CP753F	685360169002	347	750	2559	2.1	2' x 4'	28 lbs







SKU Legend: ◆ = Popular Products ● = Extended Offering (Contact your local Marley Sales Representative for typically associated lead times)

NOTE: When ordering panels with custom features, the catalog number will change. Please see next page for more information on made to order custom products.

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION
QSF2424	685360065267	Surface Mounting Frame for 24" x 24" Panels
QSF2448	685360065274	Surface Mounting Frame for 24" x 48" Panels
QRF2424	685360065090	Recess Mounting Frame for 24" x 24" Panels
QRF2448	685360065106	Recess Mounting Frame for 24" x 48" Panels

NOTE: Heating panels do not have a fire or hazardous rating, but construction is of fire retardant materials. Panels normally are treated like light fixtures. If necessary, acoustical tile can be placed on top of the panels.

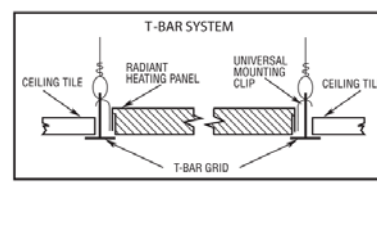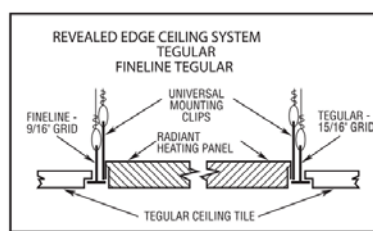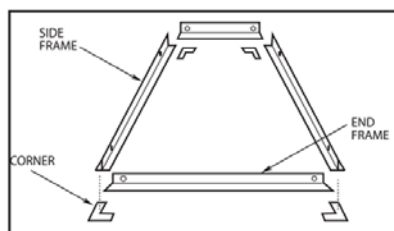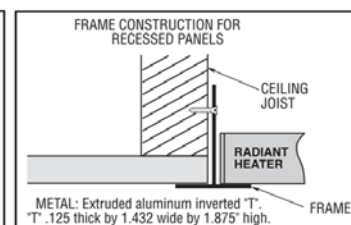

NOTE: Heating panels do not have a fire or hazardous rating, but construction is of fire retardant materials. Panels normally are treated like light fixtures. If necessary, acoustical tile can be placed on top of the panels.