

MEP-ESA-RG

End Seal Kit


Installation, Operation & Maintenance Instructions

TOOLS REQUIRED:

Diagonal cutters; needle-nose pliers;
utility knife; heat gun or propane torch


KIT CONTENTS:

(5) - Black heat-shrink tubes $\frac{1}{2}$ " x $1\frac{1}{2}$ "
(5) - Black heat-shrink tubes $\frac{3}{4}$ " x 4"

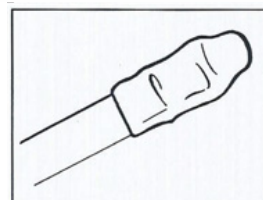


IMPORTANT INSTRUCTIONS


- 1** Strip outer jacket as shown. Do not cut into inner jacket

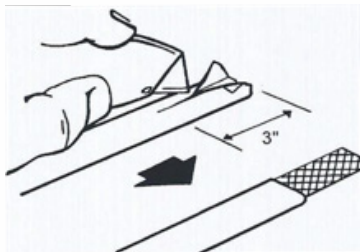


- 2** Unravel ground braid and trim $1\frac{1}{2}$ " at outer jacket; cut back.

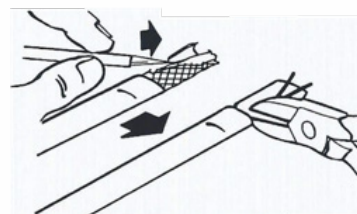

- 3** Heat-shrink $1\frac{1}{2}$ " heat-shrink tube in place with $\frac{3}{8}$ " over end of heating cable. Remove heat. Squeeze end with needle-nose pliers. Hold for 10 to 15 seconds.

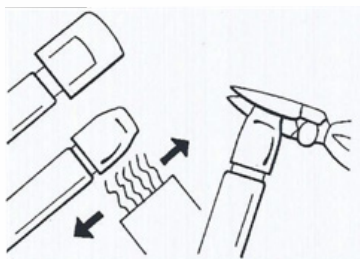

- 4** Heat-shrink $\frac{3}{4}$ " x 4" heat-shrink tube in place with $\frac{3}{8}$ " over end of smaller heat-shrink tube. Remove heat, resqueeze at end of smaller heat-shrink tube, then squeeze at end of outer heat-shrink tube. Hold for 10 to 15 seconds.

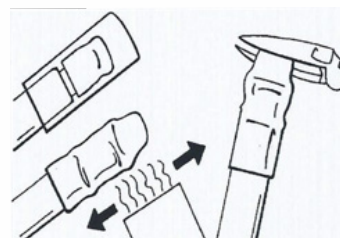

SAVE THESE INSTRUCTIONS