


CU900 SERIES

Cabinet Unit Heater

UNIT HEATERS

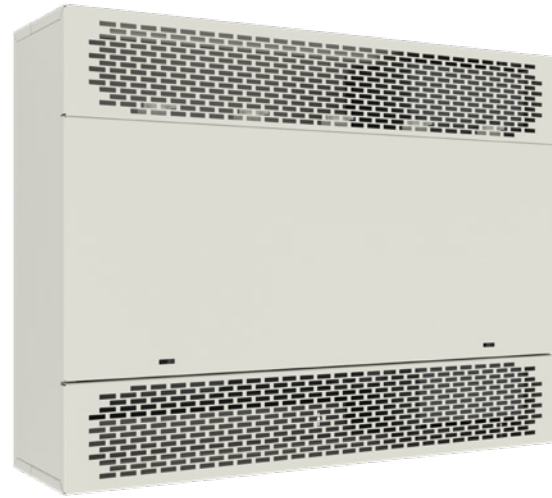


Technical Specifications:

Temp Range: 55°-85°F


CFM: 500-2,000

Ideal Spaces:


School Hallways & Churches
Transportation Terminals
Lobbies & Stairwells
Entrance Ways & Vestibule
Mechanical Rooms



White



Beige



Aluminum



Bronze



Black



Custom
Colors

Contemporary Aesthetics

- › Contemporary design to match modern and future architect specifications
- › Standard stamped grille with optional ducted grilles

Easy Install and Maintenance

- › One-person maintenance on ceiling applications with hinged front panel
- › Front cover interlock de-energizes unit when front cover is removed
- › Disposable air filter mounted in inlet air stream; optional permanent and washable aluminum filters available

Robust Design

- › Cabinet constructed of heavy 18-gauge cold-rolled steel to provide strength and finished with a polyester powder coating for corrosion resistance
- › Motors are mounted with automatic thermal overload protection; motor fuse protection is provided on all heaters to meet safety requirements
- › Comes standard with two thermal safety cutouts to automatically shut off and protect the heater in the event of overheating. Reactivates the heater when operating temperature returns to normal




Custom Cabinet Unit Heaters: Models and Specifications

	SERIES	KW	BTU/HR	FINAL AIR TEMP	CFM*	AMPERAGE						SHIP WT.
						208 1Ø	208 3Ø	240 1Ø	240 3Ø	277 1Ø	480 3Ø	
■	CU935 35 in. (L)	2	6,826	72° F	500	10	6	9	6	8	3	120 lbs
		3	10,239	78° F		15	9	13	8	12	4	
		4	13,652	84° F		20	12	17	10	15	6	
		5	17,065	90° F		25	15	22	13	19	7	
		6	20,478	96° F		30	17	26	15	22	8	
		7	23,891	102° F		34	20	30	18	26	9	
		8	27,304	108° F		39	23	34	20	30	10	
■	CU945 45 in. (L) 160 LBS.	4	13,652	72° F	1,000	20	12	18	11	16	6	160 lbs
		6	20,478	78° F		30	18	26	16	23	8	
		8	27,304	84° F		40	23	34	20	30	11	
		10	34,130	90° F		48	29	43	25	37	13	
		12	40,956	96° F		59	34	51	30	44	16	
		14	47,782	102° F		68	40	59	35	52	18	
		16	54,608	108° F		78	46	68	40	59	20	
■	CU968 68 in. (L) 260 LBS.	15	51,195	90° F	1,500	—	44	—	38	—	20	260 lbs
		21	71,673	102° F		—	60	—	52	—	27	
		24	81,912	108° F		—	69	—	60	—	31	
■	CU978 78 in. (L) 300 LBS.	20	68,260	90° F	2,000	—	58	—	50	—	26	300 lbs
		24	81,912	96° F		—	69	—	60	—	31	
		28	95,564	102° F		—	80	—	70	—	36	
		32	109,216	108° F		—	91	—	79	—	41	

SKU Legend: ■ = Made to Order (Contact your local Marley Sales Representative for typically associated lead times)
NOTE: RED numbers represent circuit breakers or fused disconnect required. **380V units will operate with a 16% reduction in heating capacity. +Based on 60°F inlet air temperature. *Values shown is high speed. All models operate at 60hz.

Multiple Air Flow Combinations:

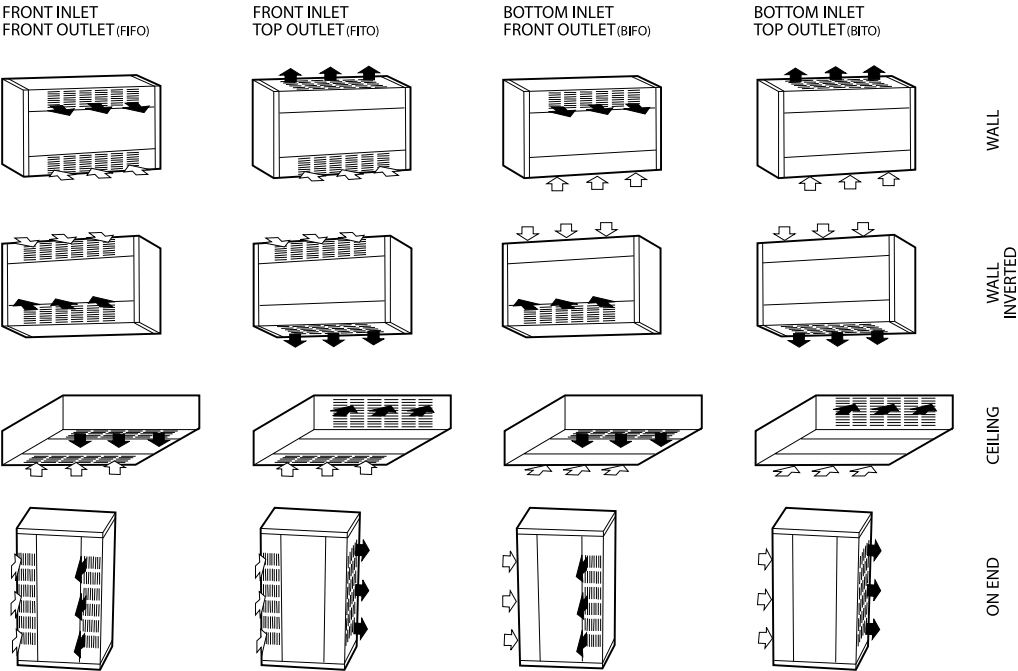

CU900 SERIES
Cabinet Unit Heater

Scan the QR code
to access additional
specs and features

Optional Accessories:

Table with 5 columns: CATALOG NO., DESCRIPTION, COMPATIBLE WITH, FUNCTION, SHIP WT. Rows include trim kits (CU935RTK, CU945RTK, CU968RTK, CU978RTK), base kits (CU935BK, CU945BK, CU968BK, CU978BK), and washable filters (CU935WF, CU945WF, CU968WF, CU978WF).

*Add the appropriate color code suffix after the catalog number; (i.e. W for White, B for Black, etc.)

Suggested Controls



Now compatible with SmartSeries Plus when used with 24VAC control transformer!

Optional Factory-Installed Accessories:

Table with 3 columns: ACCESSORY, STANDARD, OPTIONAL. Rows include 2-Stage Thermostat, Smartseries Plus, Dead Front Disconnect Switch, Dead Front Fused Disconnect Switch, On/Off Switch, Key Lock For Front Cover, Inlet or Discharge Duct Collar(S), and Louver Grilles.

* Plus price of circuit breaker.

Dimensions and Clearances:

