

HBB SERIES


Electric Hydronic Baseboard Heater

BASEBOARD



Ideal Spaces:

Bedrooms
Living/Family Room
Basements
Offices
Conference Rooms
Waiting Rooms
Entrance Ways



Beige

- › Ideal for superior, efficient and zoned Primary/Secondary comfort
- › Low profile ideal for limited wall space
- › Storage fluid maximizes convection, minimizing air flow, reducing flow of bacteria and dust
- › Large element reservoir maximizes the volume of heat storage fluid for prolonged comfort
- › Gentle heat continues to radiate even after the thermostat turns off due to the hydronic element retention qualities
- › Hydronic element reduces on/off cycling of thermostat maintaining even room comfort and reducing energy costs
- › Low surface temperatures safe for installations with pets, children and carpet
- › Heavy-duty welded steel louvered grilles discourage insertion of foreign objects
- › Built-in wire way, lead wires, and knockouts allow quick field connection from either end
- › UL-listed for installation flush to any wall and flat on any floor type; pre-notched marks for mounting guide
- › High temperature safety limit
- › Corrosion resistant aluminum fins are pressure-fitted to copper tubing to assure rapid heat transfer, air flow
- › Air flow is directed away from walls and into the room to help prevent wall streaking & minimizes dry air



HBB SERIES

Electric Hydronic Baseboard Heater

Scan the QR code
to access additional
specs and features



Models & Specifications:

ITEM INFORMATION			ELECTRICAL DATA			DIMENSIONAL DATA	
CATALOG NO.	UPC		VOLTS	WATTS	AMPS	LENGTH	SHIP WT.
◆ HBB504	68536035789		240/208	500/375	2.1/1.8	28"	10 lbs
◆ HBB754	68536035826		240/208	750/563	3.1/2.7	34"	12 lbs
◆ HBB1004	68536035635		240/208	1000/750	4.2/3.6	46"	15 lbs
◆ HBB1254	68536035673		240/208	1250/938	5.2/4.5	58"	19 lbs
◆ HBB1504	68536035710		240/208	1500/1125	6.3/5.8	70"	22 lbs
◆ HBB2004	68536035741		240/208	2000/1500	8.3/7.2	94"	30 lbs
● HBB500	68536035772		120	500	4.2	28"	10 lbs
● HBB508	68536035802		208	500	2.4	28"	10 lbs
● HBB750	68536035819		120	750	6.3	34"	12 lbs
● HBB758	68536035840		208	750	3.6	34"	12 lbs
● HBB1000	68536035628		120	1000	8.3	46"	15 lbs
● HBB1008	68536035659		208	1000	4.8	46"	15 lbs
● HBB1250	68536035666		120	1250	10.4	58"	19 lbs
● HBB1258	68536035697		208	1250	6	58"	19 lbs
● HBB1500	68536035703		120	1500	12.5	70"	22 lbs
● HBB1508	68536035734		208	1500	7.2	70"	22 lbs
● HBB2008	68536035765		208	2000	9.6	94"	30 lbs


SKU Legend: ◆ = Popular Products ● = Extended Offering (Contact your local Marley Sales Representative for typically associated lead times)

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	SHIP WT.*
HBBT1	685360035574	25 amp @ 120-277 VAC; Single-Pole Thermostat Snap-Action Type; Field-Installed in Junction Box	1 lbs
HBBT2	685360035598	25 amp @ 120-277 VAC; Double-Pole Thermostat Snap-Action Type; Field-Installed in Junction Box	1 lbs
HBBT1TP	685360035581	Same as Model HBBT1 except Tamper-Resistant	1 lbs
HBBT2TP	685360035604	Same as Model HBBT2 except Tamper-Resistant	1 lbs
HBBAC*	685360035383	Air Conditioner Outlet Section, 20 amps @ 208/240 VAC	2 lbs
HBBDR	685360035420	Duplex Receptacle Section, 15 amps @ 120 VAC	2 lbs
HBBDSDR120	685360147970	Double-Pole Disconnect Switch /120V Receptacle	3 lbs
HBBWS	685360035611	8 in. Blank Wiring Section	1 lbs
HBBLVRO*	685360035475	Low Voltage Relay Control Section, 22 amps @ 120 VAC	3 lbs
HBBLVR8*	685360035505	Low Voltage Relay Control Section, 22 amps @ 208 VAC	3 lbs
HBBLVR4*	685360035482	Low Voltage Relay Control Section, 22 amps @ 240 VAC	3 lbs
HBBCDS2	685360035390	Double-Pole Power On/Off Switch Section	2 lbs
CBDCIC*	685360014609	Inside Corner	1 lbs
CBDCOC*	685360014616	Outside Corner	1 lbs

*HBBAC - HBBDR - HBBLVR - HBBWS accessories add 8 in. to baseboard length.

Dimensions and Clearances:

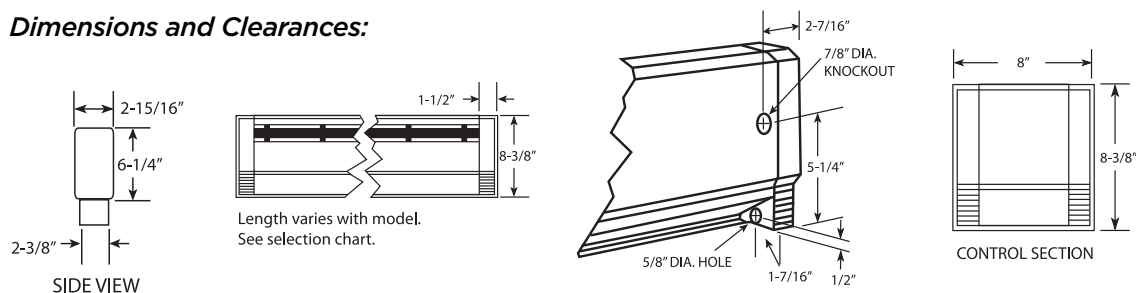


HBBT1 & HBBT2



HBBT1TP & HBBT2TP



*HBBAC



*HBBDR



*HBBLVR

*Add 8" to length of installation