


**COMMERCIAL/INDUSTRIAL
SINGLE-ELEMENT INFRARED
HEATER**

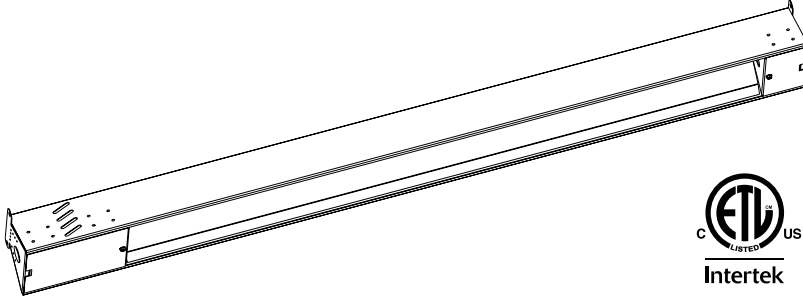

CAPACITIES

46" or 57"
1500-3000 Watts
120, 208, 240, 277, 347,
480, or 600 Volts

See Selection Chart for all Options

JOB NAME: _____

LOCATION: _____

ARCHITECT: _____

ENGINEER: _____

CONTRACTOR: _____

SUBMITTED BY: _____ DATE: _____

TAG/ITEM	QTY.	CATALOG NUMBER	HEATER			AMPS	GRILLE FINISH	CEILING MOUNT
			KW	VOLTS	Ø			

ACCESSORIES AND CONTROLS	TAG/ITEM	QTY.	CATALOG NUMBER	DESCRIPTION

SUBMITTED BY:	DATE

APPROVED BY:	DATE

JRK SERIES

ARCHITECT'S AND ENGINEER'S SPECIFICATIONS*

Furnish and install where indicated on the plans, Type JRK Single Element Infrared Heaters as manufactured by Berko®, A Division of Marley Engineered Products®, Bennettsville, SC.

Heaters shall be UL / cUL Listed and designed for horizontal indoor surface mounting. All capacities, voltages, physical sizes and options shall be as specified in the heater schedule. All heaters shall be single phase.

Enclosure shall be 20-gauge cold rolled steel, finished in a Polyester PGIC Powder Paint, with length as specified in the heater schedule.

Construction shall be a single piece design that allows one person installation and wiring

Reflector shall be one piece, snap-out, minimum .030 gold anodized aluminum with a beam angle of 60° symmetrical.

Element shall be quartz tube radiant heating type that transmit infrared rays generated by the heavy duty coiled element inside. The quartz tube shall have high thermal shock characteristics. Elements shall be equipped with threaded cold pins and hex nuts for more positive connections in severe conditions.

**Berko reserves the right to change specifications without prior notice.*

APPLICATION LIMITATIONS AND PRECAUTIONS:

Hazardous Atmosphere: These heaters are not suitable for use in hazardous locations.

Indoor Use Only

Mounting Clearances: Maintain minimum clearances of:

- 12" (305 mm) to vertical side walls
- 36" (914 mm) between heaters mounted side by side. Heaters may be mounted end to end.
- 3" (76 mm) to ceiling
- 8' (2.4m) to floor.

Maintain at least 5 ft. (1.5 m), in radiant path, between bottom of heater and combustible material.

Corrosive Atmospheres: The high quality finish and steel internal sheet metal parts will give excellent service under most operating conditions, including coastal salt air and most industrial atmospheres. However, the finish is not intended for direct salt spray exposure in marine applications or highly corrosive greenhouse, swimming pool, chemical storage or industrial atmospheres.

Models & Specifications:


ITEM INFORMATION		ELECTRICAL DATA				DIMENSIONAL DATA	
CATALOG NO.	UPC	VOLTS	WATTS	BTU/HR.	AMPS	HEIGHT	SHIP WT.
JRK41512	685360082950	120	1500	5,118	12.5	46"	9 lbs
JRK42020	685360082967	208	2000	6,824	9.6	46"	9 lbs
JRK42024	685360082974	240	2000	6,824	8.3	46"	9 lbs
JRK53020	685360083032	208	3000	10,236	14.4	57"	11 lbs
JRK53024	685360083049	240	3000	10,236	12.5	57"	11 lbs
JRK42027	685360082981	277	2000	6,824	7.2	46"	9 lbs
JRK42034	685360082998	347	2000	6,824	5.8	46"	9 lbs
JRK42048	685360083018	480	2000	6,824	4.2	46"	9 lbs
JRK42060	685360083025	600	2000	6,824	3.3	46"	9 lbs
JRK53027	685360083056	277	3000	10,236	10.8	57"	11 lbs
JRK53034	685360083063	347	3000	10,236	8.6	57"	11 lbs
JRK53048	685360083087	480	3000	10,236	6.3	57"	11 lbs
JRK53060	685360083094	600	3000	10,236	5.0	57"	11 lbs

NOTE: Quartz Lamp: used indoors for spot heating. Maintain at least 5 ft. in radiant path, between bottom of heater and combustible material. Pigtail element leads for a more positive connection in high-traffic areas where physical abuse.

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION	COMPATIBLE WITH	CARTONS	SHIP WT.
JWG46	685360138374	Wire Guard	JRK4	1	1 lbs
JWG57	685360138381	Wire Guard	JRK5	1	1 ½ lbs

Dimensions and Clearances:

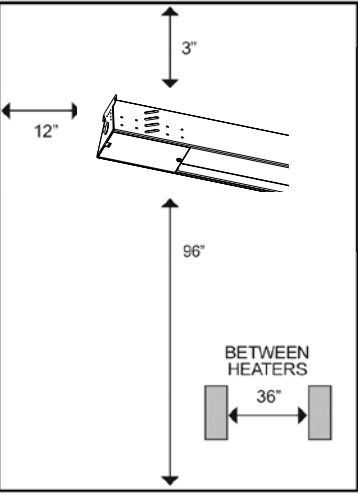

MOUNTING CLEARANCES

- 12 in. to vertical side walls
- 36 in. between heaters mounted side by side. Heaters may be mounted end to end.
- 3 in. to ceiling
- 96 in. to floor

No matter the industry or application, Marley Engineered Products has a robust portfolio of innovative, reliable, high-performance comfort heating and ventilation solutions for all your heating needs.

For more information or assistance on your next project, contact Technical Services at 800-642-4328

Scan the QR code to access additional specs and features



Approvals: _____