

# MUH35 SERIES

## Unit Heater

## UNIT HEATERS



### Technical Specifications:

Temp Range: 40°-90°F

CFM: 210

### Ideal Spaces:

Factories  
Garages  
Schools  
Shipping Docks  
Warehouses



Bronze


- › Air flow can be directed vertically, horizontally or any position in between
- › Mounts either on wall or ceiling for primary or spot heating (bracket included)
- › Built-in bi-metal thermostat; multiple wattage heat selector switch for precise amount of heat
- › Fan-only switch for air movement when no heat is required
- › Specially designed venturi outlet to meet required additional air throw in vertical position
- › Advanced pull-through air flow design draws air across heating element for even air distribution and cooler element operation
- › Heavy gauge die-formed steel housing and completely enclosed fan motor
- › Aluminum-finned, copper-clad steel sheath heating element extends life due to cooler sheath temperature and faster heat dissipation
- › High temperature manual thermal cut-off with audible alarm for added safety
- › Manual reset thermal cut-off button located on front for easy access



# MUH35 SERIES

## Unit Heater

Scan the QR code  
to access additional  
specs and features



Models & Specifications:


ITEM INFORMATION		ELECTRICAL DATA				SHIP WT.
CATALOG NO.	UPC	VOLTS	WATTS	BTU/HR.	AMPS	
◆ MUH35	685360047597	240	5000/3333	17060/11372	21.0/14.0	28 lbs
		208	3750/2500	12795/8530	18.0/12.0	

SKU Legend: ◆ = Popular Products ● = Extended Offering (Contact your local Marley Sales Representative for typically associated lead times)

Optional Accessories:

CATALOG NO.	UPC	DESCRIPTION
PHCS1B	685360150703	Cord & Plug Assembly (Optional)

Dimensions and Clearances:

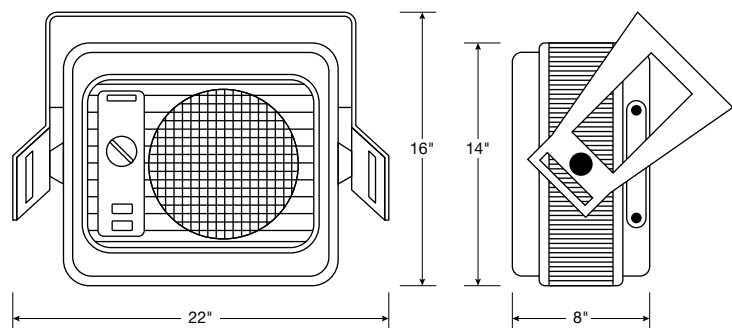

Special Combination Stand & Swivel Bracket:

Enables unit to be positioned in a variety of ways. Especially easy to install on ceilings or walls, the bracket is already predrilled with 16" O.C. mounting holes.

