

MWUH SERIES

Bundled Horizontal/Downflow Unit Heater

UNIT HEATERS




Technical Specifications:

Temp Range: 45°-90°F

CFM: 270

Ideal Spaces:

Factories
Garages
Stockrooms
Stores
Maintenance Rooms
Warehouses
Service Stations
Workshops
Stairwells



Beige


- › Heater comes equipped with ceiling-mount bracket for horizontal or vertical flow mounting or any position in between
- › Built-in single-pole thermostat
- › Copper-brazed steel fins with steel sheathed tubular elements for uniform heating and longevity
- › Adjustable louvers control air throw direction
- › Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- › High limit cut-off with visual alarm automatically shuts off current in event of overheating and reactivates unit when temperature returns to normal
- › Disconnect switch (DS30) option available for heaters 24 amps or lower.



MWUH SERIES

Bundled Horizontal/Downflow Unit Heater

Scan the QR code
to access additional
specs and features





Models & Specifications:


ITEM INFORMATION			ELECTRICAL DATA				
	CATALOG NO.	UPC	VOLTS	WATTS	BTU/HR.	HEATER AMPS	SHIP WT.
◆	MWUH5004	685360038803	208	1874	6396	9	24 lbs
				2500	8553	12	
				3123	10659	15	
				3750	12799	18	
			240	2500	8533	10.4	
				3332	11365	13.9	
				4165	14215	17.4	
				5000	17065	20.9	
◆	MWUH7504	685360148700	208	2812	9598	13.5	27 lbs
				3750	12799	18	
				4685	15990	22.5	
				5625	19198	27.1	
			240	3750	12799	15.6	
				5000	17065	20.8	
				6250	21331	26	
				7500	25598	31.3	
●	MWUH5008	685360047713	208	2500	8533	12	26 lbs
				3332	11365	16	
				4165	14215	20	
				5000	17065	24	

SKU Legend: ◆ = Popular Products; ● = Extended Offering (Contact your local Marley Sales Representative for typically associated lead times)
NOTE: Disconnect switch (DS30) option available for heaters 24 amps or lower. Units come factory wired to higher wattages. Additional wattages can be achieved with field rewiring per instruction manual.

Controls and Accessories:

CATALOG NO.	DESCRIPTION
 DS30	3-pole power disconnect switch for field installation on all heaters. Complies with "positive off" requirements.
 CWB1A	Wall mounting brackets for all units. (Ceiling mounting bracket is included with all heaters.)

Dimensions and Clearances:

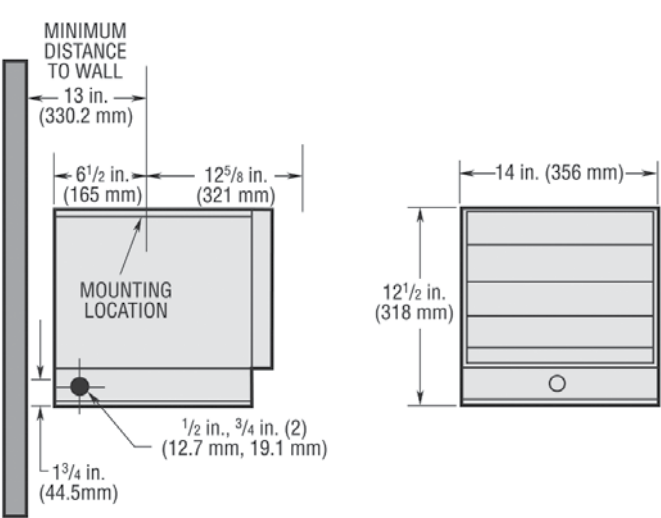

Limited space? We've got your customized comfort covered.

Choose the IUH Series Horizontal/Downflow Unit Heater for basic heating or the MWUH Bundle with an included mounting bracket and built-in thermostat for one-stop-shopping. Both have adjustable louvers and flexible mounting options that enable you to take aim at the cold. Best of all, both heaters will keep your coldest spots warm and comfortable for years to come.