


SUBMITTAL SHEET

WHT500 SERIES

UTILITY WELL

HOUSE HEATER

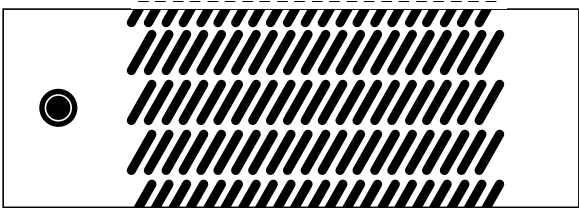

CAPACITIES
376 or 500 WATTS
120, 208 or 240V
1Ø ONLY

See Selection Chart for all Options

JOB NAME:

LOCATION:

ARCHITECT:

ENGINEER:

CONTRACTOR:

SUBMITTED BY: DATE:

TAG/ITEM	QTY.	CATALOG NUMBER	HEATER			AMPS	BUILT-IN THERMOSTAT
			KW	VOLTS	Ø		

ACCESSORIES AND CONTROLS	TAG/ITEM	QTY.	CATALOG NUMBER	DESCRIPTION

SUBMITTED BY:	DATE
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>

APPROVED BY:	DATE
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>
<input type="text"/>	<input type="text"/>

WHT500 SERIES - UTILITY WELL HOUSE HEATER

WHT500 SERIES ARCHITECT'S AND ENGINEER'S SPECIFICATIONS*

FURNISH AND INSTALL: Furnish and install, where indicated on plans, electric heater suitable for well house freeze protection as manufactured by Berko®, A Marley Engineered Products® Brand, Bennettsville, SC. Heaters shall be cETLus Listed.

ENCLOSURE: The heater shall be fabricated of 24-gauge galvanized steel, completely welded, then coated with a corrosive resistant neutral Z polyester powder paint coating.

HEATING ELEMENT: The heating element shall be of non-glowing design consisting of special resistance wire enclosed in a steel sheath to which aluminum fins are mechanically crimped.

CONTROL BOX: The heater housing shall contain an enclosed tamper proof control box to isolate all live electrical parts from the remainder of the heater. An integral thermostat with a temperature range of 40° F to 70° F shall be completely contained in the control box.




GENERAL: The heater shall be triple rated to operate at 120, 208 or 240 VAC. Shipped wired for 240/208v, field conversion to 120v is quick and easy.

**Berko reserves the right to change specifications without prior notice.*
***Limitations: Do not install in areas where water may enter heater unit. Do not locate where air flow may be obstructed.*

Models & Specifications:

ITEM INFORMATION		ELECTRICAL DATA			SHIP WT.
CATALOG NO.	UPC	VOLTS	WATTS	AMPS	
WHT500	68536008049	240/208/120	500/376/500	2.1/1.8/4.2	6 lbs

Dimensions and Clearances:

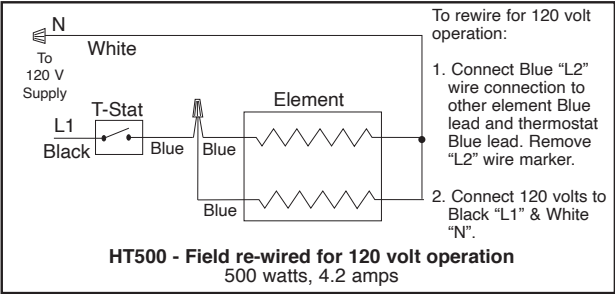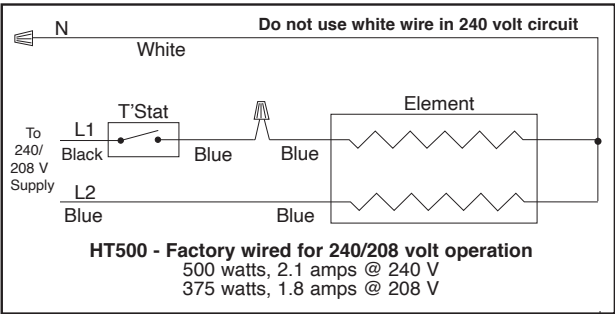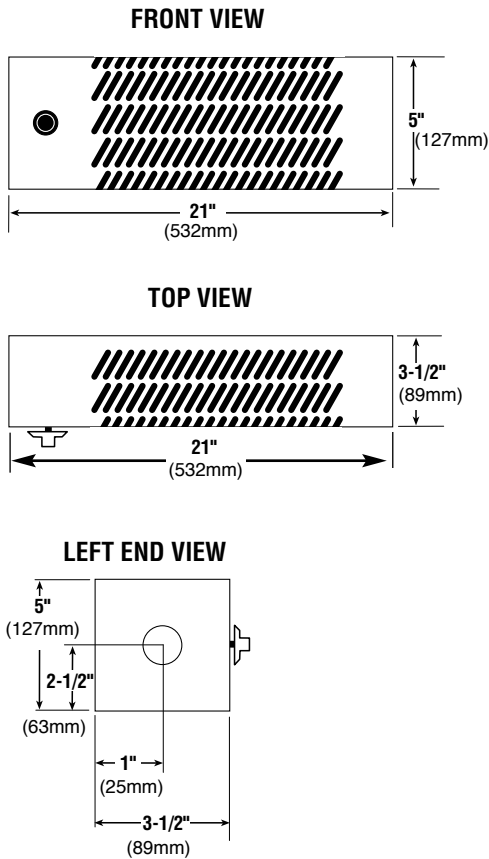

No matter the industry or application, Marley Engineered Products has a robust portfolio of innovative, reliable, high-performance comfort heating and ventilation solutions for all your heating needs.

For more information or assistance on your next project, contact Technical Services at 800-642-4328

Scan the QR
 code to access
 additional specs
 and features