

QM-MSR**Self-Regulating Heating Cable*****Technical Specifications:***

Temp Range: -40 to 366F

Applications:

Hot Water Temperature Maintenance
Flow Maintenance
Grease Waste Maintenance

- › Self-Regulating Power Output
- › Continuous Maintenance Temperature
 - 250°F (120°C) Max
- › Maximum Exposure Temperature
 - 366°F (185°C) Max
- › Output Wattage
 - 5,10,15 W/FT @ 50°F
 - 16,33,49 W/M @ 10°C
- › Supply Voltage
 - 120, 208-277 VAC
- › T-Rating
 - 5,10,15 W/FT = T3
- › Size = 9/16" W x 1/4" H
- › Minimum Bend Radius = 1 1/8"
- › Minimum Install Temperature
 - 40°F (-40°C)
- › Cut to Length and terminate in the field
- › Can be overlapped without burnout



Maximum Circuit Lengths per start up temperature and circuit breaker size are shown below. Use local electrical codes to select appropriate branch circuit breakers. Ground Fault circuit breakers are required for heat trace branch circuits – typical minimum trip level is 30mA. Thermal magnetic circuit breakers are recommended to reduce nuisance tripping.

Models & Specifications: Circuit Breaker Sizing

ITEM INFORMATION		MAXIMUM CIRCUIT LENGTH VS BREAKER SIZE & START-UP TEMP FT (M)					SHIP WT.
CATALOG NO.	UPC	START-UP TEMPERATURE DEG F DEG C	15A	20A	30A	40A	
QM-MSR05-1		50 (10)	150 (45)	200 (60)	240 (73)	240 (73)	
		0 (-18)	135 (41)	180 (55)	220 (67)	220 (67)	
		-40 (-40)	130 (40)	170 (52)	210 (64)	210 (64)	
QM-MSR05-2		50 (10)	250 (76)	330 (100)	480 (146)	480 (146)	
		0 (-18)	230 (70)	305 (93)	440 (134)	440 (134)	
		-40 (-40)	220 (67)	295 (90)	420 (128)	420 (128)	
QM-MSR10-1		50 (10)	90 (27)	120 (37)	180 (55)	180 (55)	
		0 (-18)	85 (26)	110 (34)	165 (50)	165 (50)	
		-40 (-40)	80 (24)	105 (32)	160 (49)	160 (49)	
QM-MSR10-2		50 (10)	140 (43)	190 (58)	280 (85)	280 (85)	
		0 (-18)	130 (40)	175 (53)	260 (79)	260 (79)	
		-40 (-40)	125 (38)	170 (52)	250 (76)	250 (76)	
QM-MSR15-1		50 (10)	70 (21)	90 (27)	130 (40)	130 (40)	
		0 (-18)	65 (20)	85 (26)	125 (38)	125 (38)	
		-40 (-40)	60 (18)	80 (24)	120 (37)	120 (37)	
QM-MSR15-2		50 (10)	100 (30)	135 (41)	200 (60)	200 (60)	
		0 (-18)	95 (29)	125 (38)	185 (56)	185 (56)	
		-40 (-40)	90 (27)	120 (37)	180 (55)	180 (55)	

SKU Legend: ◆ = Popular Products; ● = Extended Offering (Contact your local Marley Sales Representative for typically associated lead times)

NOTE: Circuit lengths shown above are based on trip current characteristics of Type QO and Type QOB devices. For equipment with different trip current characteristics please consult Marley

All Cables require power connection and end seal terminations as a minimum to comply with third party requirements. Marley offers accessories to provide trouble free easy installation and maximum cable circuit life.

Connection Accessories:


MODEL	UPC	DESCRIPTION	SHIP WT.*
PCA-40J		Power Connection	
PCA-40P		Pipe Stand Off Kit	
SPTA-1		Splice/Tee Connection	
ESA-ES		End Seal	
LESA-1		Light End Seal 120V	
LESA-2		Light End Seal 208-240V	
HTTS-A		Thermostat - Ambient Sense	
HTTS-L		Thermostat - Line Sense	
HTFT-1		Application Tape	
HTAT-1		Aluminum Foil Tape	
HTPS-6		6 inch Pipe Strap	
HTPS-10		10 inch Pipe Strap	
QM-HTCL-1		Caution Label (10/pk)	

All Cables require power connection and end seal terminations as a minimum to comply with third party requirements. Marley offers accessories to provide trouble free easy installation and maximum cable circuit life.

QM-MSR Self-Regulating Heating Cable

Construction:


- A. 16 AWG Nickel Plated Copper Buss Wires
- B. Modified Fluoropolymer heater core
- C. Modified Fluoropolymer insulating jacket
- D. Tinned Copper Braid
- E. Modified Fluoropolymer Outer Jacket
 - Protects against organic, inorganic and corrosive chemicals

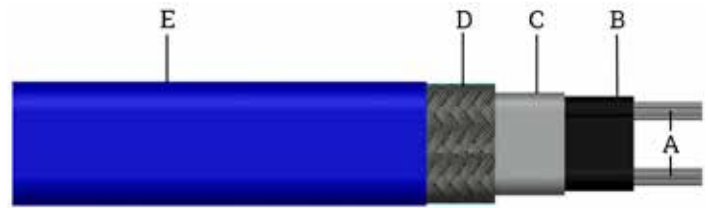

Power Output Curves:

Power Output Curves shown below apply to cables used at service voltages shown below on insulated metal pipes. For other applications contact Marley.

POWER ADJUSTMENT FACTOR		
MODEL	208 VOLTS	277 VOLTS
QM-MSR05-2	0.78	1.25
QM-MSR10-2	0.86	1.16
QM-MSR15-2	0.92	1.09

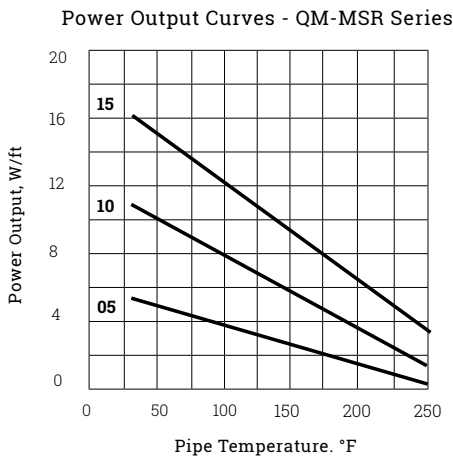

Product Ordering Information:

(Example Shown: 5 watt, 120 volt, tinned copper braid)

QM-MSR 05 - 1 I T 00

Series _____

QM-MSR

Output _____

05 = 5w
10 = 10w
15 = 15w

Voltage _____

1 = 120V
2 = 208 - 277V

Class _____

1 - Ord. / Div. 2

Braid Option _____

T = Tinned Copper w/ Fluoropolymer Jacket

Reserved _____

ORDERING INFORMATION				
OUTPUT W/FT	VOLTS	MODEL	STOCK	LBS/1000'
5 W/FT @ 50F	120	QM-MSR05-11T00	S	80
	208-277	QM-MSR05-21T00	S	80
10 W/FT @ 50F	120	QM-MSR10-11T00	S	80
	208-277	QM-MSR10-21T00	S	80
15 W/FT @ 50F	120	QM-MSR15-11T00	S	80
	208-277	QM-MSR15-21T00	S	80

Note = To order specify model, length, and connection accessories. Cables are shipped +/- 5% of label, maximum spool length 1000 feet, minimum order is 250 feet. No fee to cut to length between 250 and 1000 feet.