# **CPL SERIES** Decorative Pedestal Steel Convector

# CONVECTORS



# Ideal Spaces:

Offices Hallways Lobbies Retail Spaces Terminals

Commercial / Institutional Spaces with Floor-to-Ceiling Windows





Black Aluminum









- > CPL (Decorative) ideal for primary, secondary or supplemental heat where wall mounting is not viable
- > Perfect for under-the-window heat loss and condensation prevention
- > Durable front cover constructed of 16-gauge steel (optional 14-gauge available)
- > Pedestal-mounted design; bottom inlet top outlet
- > Units may contain 1–3 heating elements that yield a broad range of heating capacity (see specifications)
- > Optional ¼ in. mesh located under the discharge grille to deter insertion of objects and restriction of airflow
- > Blend into any décor with 8 standard color options or custom finishes available upon request
- > Units can be mounted from wall-to-wall or as discrete units in standard lengths of 28 in. to 10 ft.
- Optional built-in controls include: line voltage thermostat (SPST or DPST); power on/off switch; power relay; or transformer relay (see specifications)
- > Right- or left-hand entry/wiring flexibility with identical pre-wired junction boxes at either end
- > End-to-End wire-way provided for ease of wiring; and rated per the NEC conduit size and rating codes. Please consult factory for proper sizing and specifications
- > Easy connection of supply wiring from bottom, rear or end, as well as multiple wiring of adjacent heaters from one entry point
- > For service, all internal parts are accessible by removing cover



# **CPL SERIES Decorative Pedestal Steel Convector**

## 5 ½" x 3" — Single Element

### Lengths

Length	28″	3'	4'	5′	6′	8′	10′
Shipping Weight	11 lbs	15 lbs	18 lbs	25 lbs	29 lbs	38 lbs	47 lbs

NOTE: All models are NON-STOCK, MADE-TO-ORDER. When ordering, specify quantity, catalog number, voltage, wattage, optional controls, and color. Consult sales representative for lead times.

#### Watts per Ft.\*

125	188
250	

\*Specs vary by length. Refer to the submittal sheet for full details.

### 7" x 5" — Multiple Elements

### Available Length

Length	28″	3'	4'	5′	6′	8′	10′
Shipping Weight	11 lbs	15 lbs	18 lbs	25 lbs	29 lbs	38 lbs	47 lbs

Voltages\*

Single Phase\*

Three Phase\*

NOTE: All models are NON-STOCK, MADE-TO-ORDER. When ordering, specify quantity, catalog number, voltage, wattage, optional controls, and color. Consult sales representative for lead times.

#### Watts per Ft.\*

1 Element*	125	188	250
2 Elements*	375	500	
3 Elements*	564	625	750

\*Specs vary by length. Refer to the submittal sheet for full details.

#### **Optional Accessories:**

CATALOG N	IO. DESCRIPTION	COMPATIBLE WITH	SHIP WT.
CPLASBL21	28-Inch Blank Section		10 lbs
CPLASBL31	3-Foot Blank Section		13 lbs
CPLASBL41	4-Foot Blank Section	CPLAS Heaters	17 lbs
CPLASBL51	5 Foot Blank Section		21 lbs
CPLASBL61	6-Foot Blank Section		25 lbs
CPLASBL81	8-Foot Blank Section	CPLAS Heaters	32 lbs
CPLASBL81 CPLASBL10 CPLAMBL21 CPLAMBL21 CPLAMBL31	10-Foot Blank Section		42 lbs
CPLAMBL21	28-Inch Blank Section		14 lbs
CPLAMBL31	3-Foot Blank Section		18 lbs
CPLAMBL41	4-Foot Blank Section	CPLAM Heaters	24 lbs
CPLAMBL51	5 Foot Blank Section		30 lbs
CPLAMBL61	6-Foot Blank Section		36 lbs
CPLAMBL81	8-Foot Blank Section	CPLAM Heaters	48 lbs
CPLAMBL10	1 10-Foot Blank Section		60 lbs
CPLASPD2	Pedestal Leg Kit for 2, 3 & 4 ft. units (quantity 3)		3 lbs
CPLASPD3	Pedestal Leg Kit for 5, 6 & 8 ft. units (quantity 3)	Legs must be ordered with CPLAS Heaters/Blanks	4 lbs
CPLASPD3 CPLASPD4 CPLAMPD2	Pedestal Leg Kit for 10 ft. unit (quantity 4)		5 lbs
CPLAMPD2	Pedestal Leg Kit for 2, 3 & 4 ft. units (quantity 2)		4 lbs
CPLAMPD3	Pedestal Leg Kit for 5, 6 & 8 ft. units (quantity 3)	Legs must be ordered with CPLAM Heaters/Blanks	5 lbs
CPLAMPD4	Pedestal Leg Kit for 10 ft. unit (quantity 4)		7 lbs
CSLASECR1	Right Hand End Cap		1 lbs
CSLASECRI CSLAMECRI	Right Hand End Cap	CPLAS/CPLAM Heaters/Blanks	1 lbs
CSLASECL1	Left Hand End Cap		1 lbs
CSLAMECL1	Left Hand End Cap	CPLAS/CPLAM Heaters/Blanks	1 lbs

All steel convectors come standard with end caps. All pedestal style steel convectors come standard with pedestals. Outlet Mesh: Price per foot. 14-Gauge Front Cover: add 10% to heater price. Standard color included in base price. Other colors available. See paint policy page for information on custom paint colors. If color is not specified, front covers will be Beige. Back, grille, and accessories will be statuary bronze. When ordering, specify heater catalog number, voltage, phase, suffix catalog number for built-in controls, color, and options. Specify color for pedestal legs.

See Convector Heater Controls page for Optional Controls.

Voltages*					
120	208	240			
277	347	600			

208

347

208

240

600

240

277


600


# **CPL SERIES** Decorative Pedestal Steel Convector


Scan the QR code to access additional specs and features



### Dimensions and Clearances:

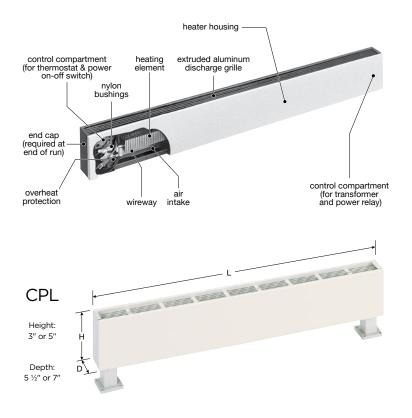





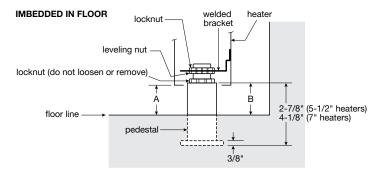

PEDESTAL DETAILS

#### PEDESTAL LOCATION





BOTTOM OF 5-1/2 IN. HEATER

